

JAMAICA ELECTRIC SECTOR UTILITY SECTOR DISTRIBUTION CODE

DISCLAIMER

This is a draft document and is a work in progress. The document is in the process of preparation and editing and as such Table of Contents, page numbering, appendixes, glossary will be added or modified as appropriate based on stakeholders review comments.

This draft document is for review only by the OUR and Stakeholders. It should not be relied upon by any other party or parties or used for any other purpose.

The Office of Utilities Regulation (OUR) accepts no responsibility for the consequences of this document being relied upon by any other party, or used for any other purpose, or containing any error or omission which is due to an error or omission in data supplied to us by other parties.

The data, conclusions and recommendations will remain draft until the documents have gone through the review process and is approved by the legally authorized entities

DC 1 SCOPE

DC 1.1.1 This Distribution Code sets out the procedures and principles governing the System Operators relationship with all Users of the System Operator s Distribution System.

DC 1.1.2 The Distribution Code shall be complied with by the System Operator and existing and potential Embedded Generators and Users connected to or seeking to connect to the System.

DC 2 GENERAL REQUIREMENTS

DC 2.1.1 This Distribution Code contains the procedures to provide an adequate, safe and efficient service to all parts of Jamaica, taking into account a wide range of operational circumstances. It is however necessary to recognise that the Distribution Code can not address every possible situation. Where such unforeseen situations occur the System Operator shall act as a reasonable and prudent operator in the pursuance of any or a combination of the following General Requirements. To protect the safety of the public and employees

- a. The need to preserve the integrity of the System
- b. To prevent damage to the System.
- c. Compliance with conditions under its Licence
- d. Compliance with the Act
- e. Compliance with the Transmission Code
- f. Compliance with the Generation Code

DC 2.1.2 Users shall provide such reasonable co-operation and assistance as the Grid Operator reasonably request in pursuance of the General Requirements.

DC 3 LONG TERM DISTRIBUTION NETWORK PLANNING

DC 3.1 Purpose and Scope

DC 3.1.1 The purpose of this chapter of the *Distribution Code* is to:

- a. Specify the responsibilities of the , *Users* and *Generators* with respect to the planning of the *Distribution System*;
- b. Specify the technical studies and planning procedures to ensure that the *System* is planned in compliance with statutory requirements;
- c. Specify the planning data required to be supplied by *Users* and *Generators* to the and by the to *Users* and *Generators* to enable the *System* to be planned to meet statutory requirements.

DC 3.1.2 The scope of this chapter covers:

- a. *System Operator*
- b. *System Users;*
- c. *Embedded Generators* and
- d. *Generators*

DC 3.2 Distribution Planning Responsibilities

DC 3.2.1 The is responsible for *Distribution System* planning including:

- a. Analysing the impact of changes to an existing *Users Systems*;
- b. Analysing the impact of the connection of new *Users Systems*;
- c. Analysing the impact of new generation connections;
- d. Analysing the impact of the connection of *Rural Electrification Projects*;
- e. Planning the network to meet forecast demand and forecast generation capacities;
and
- f. Identifying and correcting areas of non-conformance with planning criteria related to Voltage Drop, *System Capacity*, Fault Level, *System Loss* and Power Quality.

DC 3.2.2 To address areas of non-conformance, reinforcement, extension, protection modification and power quality improvement, works may be required at or on:

- a. the *Connection Point* between the *Users System* and the *s System*,
- b. the *Distribution System* remote from *User Connection Points* and
- c. the *Transmission System* remote from *User Connection Points*

DC 3.2.3 The *Users* and *Generators* are responsible for provision of information to support the requirements of the and to operate their *Systems* in accordance with the data provided.

DC 3.3 Planning Process


DC 3.3.1 The shall follow a planning process divided into major activities as follows:

- a. Identification of the need for expansion or modification of the *Distribution System*;
- b. Formulation of alternative options to meet this need;

- c. Study of these options to ensure compliance with agreed technical limits and justifiable reliability and quality of supply standards;
- d. Costing of these options and determination of the preferred option on the basis of procedures consistent with *Prudent Utility Practice* ;
- e. Approval of the preferred option in line with *JPS Financial Authorisation Levels* and initiation of execution.

DC 3.4 Planning Timescales

DC 3.4.1 The planning process above should operate on an annual planning cycle. The cycle commences with the gathering of information for the demand forecasting process in DPC 3.2.2 at the beginning of Q3 (year n) and completes with the production of the Generation Least Cost Expansion Plan at the end of Q2 (year n+1) followed by the Distribution Expansion Plan a month later.

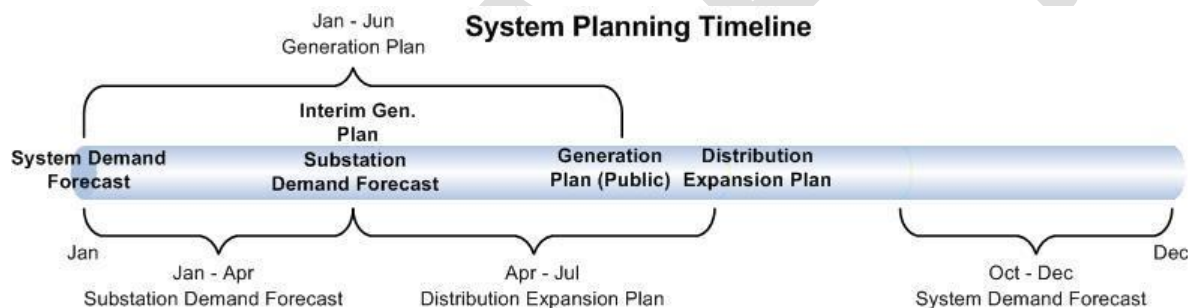

DC 3.4.2 Connection related planning studies will be undertaken outside the above process, but new load information will be used to inform the demand forecasts. The timescales required to undertake the new connection studies necessary to plan the *System* vary depending on the driver for the studies and the ability to obtain consented routes.

DC 3.4.3 For smaller connections the planning timescales are set and agreed with the *OUR*. These are included in the Distribution Connection Code section of this Distribution Code.

DC 4 Planning Principles

DC 4.1 Planning Criteria

DC 4.1.1 Planning criteria are based on the requirement to comply with statutory requirements. Where no statutory requirements exist the criteria are based on international practices which would be expected of a reasonable and prudent.

DC 4.1.2 The overriding principle in the planning of the *System* is the compliance with the licence requirement for the to “provide an adequate, safe and efficient service based on modern standards”.

DC 4.1.3 The effective planning of the *Distribution System* requires consideration of a broad range of factors that can affect the network. These factors are identified in Appendix A to this Distribution Planning Code which serves as a representation of the broad scope of any *System* planning activity.

DC 4.2 Voltage Criteria

DC 4.2.1 The *System* shall be designed to ensure that under normal and planned contingency conditions, voltages at all Connection points and buses are to be within:

- a. $\pm 5\%$ of nominal voltage under normal conditions
- b. $\pm 6\%$ of nominal Voltage under planned contingency conditions

DC 4.3 Load Power Factor

DC 4.3.1 The *System* will be planned for a normal load power factor of 0.95.

DC 4.4 Security of Supply

DC 3.4.1 Jamaica does not have a prescriptive reliability standard that covers the *Distribution System* planning in terms of maximum restoration times for different load groups under different contingency considerations. This does not mean that security of supply is disregarded in the planning of the Distribution system. The Service Area Concept as described in DC 3.5 will be used to set a base n-1 contingency level on a geographic basis and as a general planning guidance the overall network should be designed to ensure that 98% of customers affected by faults can be restored within 24 hours as assessed on an annual basis.

DC 4.5 The Service Area Concept

DC 4.5.1 The *Distribution System* has developed using predominantly radial HV feeders teed off of open ring *Systems* close to the Transmission *System* substations.

DC 4.5.2 The design criteria utilises a concept of Service Areas. Which are a network of substations and feeders defined by any subset of the following parameters:

- a. Geography;
- b. Feeder Connectivity;
- c. Customer Type;

- d. Serviceability of Load (Transformer Capacity, Acceptable Voltage);
- e. Cost of Service Delivery.

DC 4.5.3 The Service Areas will be defined by the.

DC 4.5.4 In practical application the definition of Service Areas describes a section of (usually interconnected) *Distribution System* supplied from one or more HV busbars. A Service Area is not necessarily a load centre, however, situations may arise where this is the case.

DC 4.5.5 The Service Area should be able to sustain itself under normal conditions, and during any single contingency event (i.e. loss of transformer, feeder, recloser etc).

DC 4.5.6 The objectives of the Service Area concept are as follows:

- a. Ensure reliable service under normal and N-1 contingency conditions.
- b. Localize impact of N-1 contingency.
- c. Ensure restoration of supply to customers after contingency in accordance with the *Overall Standards*.
- d. Ensure structured approach to expansion of the distribution network.
- e. Maximise utilization of distribution plant and assets by feeder load management.
- f. Group homogenous customers to facilitate delivery of special service needs.
- g. Ensure network safety and security.

DC 4.5.7 Service Area design criteria are as below:

- a. Substation MVA capacity should be sufficient to satisfy load demand and to sustain a N-1 contingency situation;
- b. Service voltages for all feeders should be the same;
- c. Where economically feasible, each Service Area should have at least two (2) 3-phase interconnection points to adjacent Service Areas;
- d. Each feeder in Service Area must have at least one (1) 3-phase connection to a feeder supplied by another transformer;
- e. Feeder loadings must be maintained to sustain 100% load transfers within the Service Area after any contingency event;

- f. Service Area must be returned to normalcy after contingency.

DC 4.5.8 Investment triggers for reinforcement expenditure to support the Service areas are as below:

- a. Violations of design criteria requirements for Service Area;
- b. Alternatives for load transfers do not exist;
- c. Transformer loading exceed 105% of thermal rating under N-1 contingency conditions;
- d. Overhead line exceed 100% of thermal rating under normal or contingency conditions;

Violations of service voltage criteria under normal or N-1 conditions.

DC 5 PLANNING STUDIES

DC 5.1 General

DC 4.1.1 The will undertake distribution planning studies as required to:

- a. Determine the connection requirements for any *Users System*, submitted in accordance with the connection application process, including any reinforcement, protection or power quality improvement requirements;
- b. Determine the connection requirements for any *Generators System*, submitted in accordance with the connection application process, including any reinforcement, protection or power quality improvement requirements;
- c. Prepare the Distribution Least Cost Expansion Plan which is prepared as required by the *OUR*.


DC 5.2 Demand Forecasts

DC 5.2.1 Demand forecast are required to enable the network to be developed in a coordinated and economic manner. A consumption forecast using an econometric regression methodology is considered suitable for this. This forecast of unit consumption is then to be developed into a peak demand forecast for each substation which will inform the studies outlined further in this section.

DC 5.2.2 The overall process for development of the demand forecast at substation level is as below. This should be undertaken on an annual basis in line with the planning timescales in DC 2.4.1.

DRAFT

System and Substation Demand Forecast Process

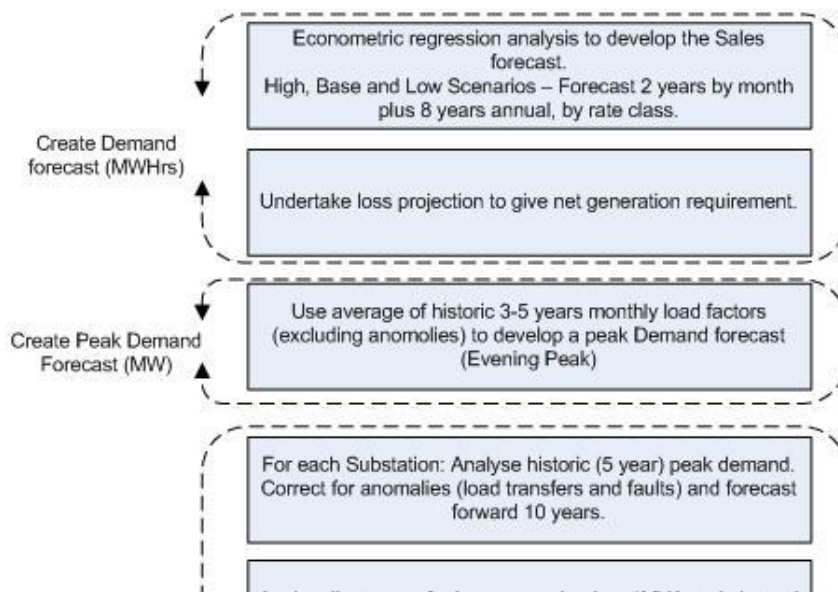

DC 5.3 LOAD FLOW STUDIES

DC 5.3.1 The will undertake load flow studies using appropriate modelling tools.

DC 5.3.2 Load flows will be modelled at peak feeder loads, based on the feeder metering data or SCADA data where metering data is not available, with forecasts at a feeder level based on regression analysis and forecast forward for an appropriate period to ensure that all network components are operating within their design parameters for the forecast period.

DC 5.3.3 Load flows will model the contingency scenarios planned for in the network design and will be undertaken to ensure that all network components are operating within their design parameters for all plausible scenarios of supply network reconfiguration. Short term and emergency ratings of plant may be used if it is considered that the timescale for restoration to normal operation will align with the manufacturers guidance on such ratings, or other parameters as determined by the .

DC 5.4 Voltage Drop Studies

DC 5.4.1 The will undertake voltage drop studies to determine the voltages at all connection points using appropriate modelling tools. Such studies will be used to determine the impact of any load connection, generation connection, *System* extension or reinforcement.

- DC 5.4.2 The planning of Voltage regulation will be in accordance with the principles in Engineering Standard ES-1300 section 1.2.3. These principles recommend that voltage regulation planning takes into account 5 year load growth forecasts and includes the use of:
- Tap changers to maintain busbars at constant voltage;
 - Line Drop Compensation;
 - In line voltage regulators; or
 - Capacitors (fixed capacitor banks should be sized on present requirements rather than growth forecasts to avoid over voltage).
- DC 5.4.3 The *Distribution System* will be planned with voltage controlled level bars on the secondary sides of the 69/24kV, 69/13.8kV and 69/12kV sides of the relevant transformers using automatic tap changers.
- DC 5.4.4 Capacitors may be used to provide voltage improvement on the distribution network. Their use will be in accordance with Engineering Standard ES-1300 section 1.2.3.1. which provides guidance in the following applications:
- Reducing the lagging component of circuit current;
 - Increasing the voltage level at the load;
 - Improving voltage regulation, if the capacitors are properly switched;
 - Reducing I^2R power loss and I^2X kVAR loss in the system because of reduction in current;
 - Increasing power factor of source generators;
 - Decreasing kVA loading on source generators and circuits to relieve overloads and reduce demand.
- DC 5.4.5 Suitable control *Systems* will be employed where required to ensure that excess voltages are not experienced at *connection points* during periods of light load or abnormal running conditions.
- DC 5.4.6 Voltage regulators may be used to provide level bars or fixed voltage increases at intermediate points on the Distribution network. Their use will be in accordance with Engineering Standard ES-1300 section 1.2.3.2. which covers the rating, determination of optimum location, requirements for bypassing, control settings and economic evaluation

of regulators and recommends the determining of size and location after fixed capacitor bank sizes and locations have been determined.

DC 5.4.7 Voltage drops will be modelled at peak feeder loads based on the feeder metering data, or SCADA data where metering data is not available, to ensure that the design voltage at the customer connection points meet the voltage requirements of this code.

DC 5.4.8 Voltage drops will be modelled for the contingency scenarios planned for in the network design and will be undertaken to ensure that the design voltage at customer connection points meets the voltage requirements of this code for all plausible scenarios of supply network reconfiguration.

DC 5.4.9 Any extension or connection to the *s Distribution System* shall be designed in such away that it does not adversely affect the voltage control employed on the *Distribution System*. Information on the voltage regulation and control arrangements will be made available by the if requested by the *User*.

DC 5.5 Short Circuit Studies

DC 5.5.1 The will undertake fault level studies at all switching points on the network where fault interrupting devices are located. The studies will determine the 3 phase and single phase to ground short circuit levels. Studies will be carried out for the *Maximum Plant and Minimum Plant* conditions.

DC 5.5.2 The *System* should normally be designed to ensure that the short-circuit fault current does not exceed 80% of the declared manufacturers ratings of all switches, fuses, circuit breakers and other protective devices in terms of both *Breaking Capacity* and *Making Capacity*.

DC 5.5.3 Where it is identified that the design *Breaking Capacity* or *Making Capacity* is likely to be exceeded, the non-compliance should be documented and the plant subject to appropriate operational restrictions until compliance is achieved.

DC 5.5.4 The and *User* will exchange information on fault infeed levels at *Connection Points*. This shall include:

- a. The maximum and minimum three-phase and line to ground fault in feeds; and
- b. The X/R ratio under short circuit conditions.

DC 5.5.5 Unless the agrees otherwise it is not acceptable for a *User* or *Embedded Generator* to limit fault current infeed to the *s Distribution System* through the use of protection and associated *Equipment* if the failure of that protection and associated *Equipment* could cause the *s Distribution System* to operate outside its short circuit rating.

DC 5.6 System Loss Studies

DC 5.6.1 *System* loss studies shall be performed to quantify the losses in the Distribution *System* and determine optimum *System* open points to provide an acceptable balance between reduced losses and *System* reliability.

DC 5.6.2 Where investment in the *System* is required, lower loss solutions, in terms of plant and *System* configuration should be evaluated as part of the alternative solutions and appropriate allowances made in the economic appraisal for any benefit arising from the adoption of such solutions.

DC 5.7 Reliability

DC 5.7.1 *System* reliability studies shall be carried out to determine the theoretical levels of SAIDI and SAIFI for the *System* using average fault rates for *System* components. These studies will be used to determine optimum *System* configurations when undertaking any connection, extension to or reinforcement of the distribution *System*.

DC 5.7.2 SAIDI and SAIFI have the definitions as described in IEEE Standard 1366-1998.

DC 5.7.3 SAIDI – The *System* Average Interruption Duration Index is the average outage duration for each customer served. It is measured in units of time, minutes or hours, and is calculated as:

$$\text{SAIDI} = \frac{\text{sum of all customer interruption durations}}{\text{total number of customers served}}$$

DC 5.7.4 SAIFI - The *System* Average Interruption Frequency Index is the average number of interruptions that a customer would experience. It is measured in units of interruptions per customer, usually over the course of a year, and is calculated as:

$$\text{SAIFI} = \frac{\text{sum of all customer interruptions total}}{\text{number of customers served}}$$

DC 5.8 Economic Criteria to be Adopted for Least Cost Expansion Planning

- DC 5.8.1 The planning studies described in this section may require solutions to be developed to address any non-conformances found. It is usual that several alternative solutions will be determined. The will use recognised methods of financial investment appraisal to ensure that the option chosen represents the most efficient investment over the life of the assets.
- DC 5.8.2 Unless other methods are agreed with *OUR*, the will utilise a *Discounted Cash Flow* method to decide between alternative projects. The appraisal will normally cover a 40 year investment period unless the nature of the assets to be installed requires an alternative period.
- DC 5.8.3 The *Discount Rate* used will be 12% or other values as agreed between the and the *OUR* from time to time.
- DC 5.8.4 For each comparable viable solution the investment appraisals will require financial benefits to be determined for:
- a. Reduction in Losses;
 - b. Improvements in Safety;
 - c. Improvements in Quality of Supply; and
 - d. Costs of maintenance.
- DC 5.8.5 The methodology for determining a-d above shall be documented by the and applied in a consistent manner.

DC 5.9 System Grounding

- DC 5.9.1 *System* grounding will be in accordance with the *Systems* Grounding Regulations in Engineering Standard ES-1300 section 2.7.
- DC 5.9.2 *System* Grounding will be designed to the following key principles:
- a. To protect life from danger or electric shock, and property from damage.
 - b. To limit the voltage upon a circuit when exposed to higher voltages than that for which the circuit is designed.
 - c. In general to limit AC circuit voltages to Ground to 150V or less on circuits supplying interior wiring *Systems*; and
 - d. To limit the voltage on a circuit which might otherwise occur through exposure to lightning.

DC 6 STANDARD PLANNING DATA

DC 6.1 Energy and Demand Forecast

DC 6.1.1 Where the considers it necessary, the *User* shall provide the with its Energy and Demand forecasts at each *Connection Point* for the five succeeding years.

DC 6.1.2 This forecast data, for the first year will include monthly Energy and Demand forecasts, while the remaining four years will include only annual forecasts.

DC 6.1.3 The *Users* shall provide the net and gross values of Energy and Demand forecast. The net values will be less any deductions to reflect the output of Customer Generating Plant.

DC 6.1.4 The following factors shall be taken into account by the and *Users* when forecasting demand:

- a. Historical Demand Data;
- b. Demand Trends;
- c. Customer Self Generating Plant Schedules; and
- d. Demand Transfers.

DC 6.2 Distribution System Data

DC 6.2.1 The shall have available all the data relevant to the *Distribution System* itself. This network data includes the following:

DC 6.2.2 Transformers (Including Voltage Regulators) - The primary input data for transformers includes MVA rating, primary and secondary winding voltages, windings connection, sequence impedances, X/R ratio, tap ranges, tap settings, emergency ratings.

DC 6.2.3 Distribution Lines -The primary input data required among other things are line voltage, conductor type, type of construction, thermal ratings, emergency rating, sequence impedances.

DC 6.2.4 Embedded Generators - Generators are modelled by their real and reactive power capabilities for steady state analysis. For dynamic analysis more detailed mathematical models are required for generators, exciters and governor control *Systems*. The generators are represented by their mathematical model which includes the synchronous, transient and sub transient reactance and inertia constants. The excitation and governor control *Systems* are modelled by their type 1 excitation and type 10 general-purpose governor

control model respectively.

DC 6.2.5 Other Parameters - In order to develop a reliability data bank outage rates and durations for all major equipment are also necessary.

DC 6.3 User System Data

DC 6.3.1 For *Low Voltage* connected *Users* the following data will be required by the

- a. Maximum power requirement (kVA or kW)
- b. Type and number of significant load items (Cookers, Showers, Motors, Welders etc)

DC 6.3.2 For *Users* Connected at High Voltage the following data will be provided to the .

- a. Connected Load including type and control arrangements
- b. Maximum demand

For Fluctuating and Cyclical Loads:

- c. The rate of change of demand
- d. The switching Interval
- e. The magnitude of the largest step change

DC 7 EMBEDDED GENERATORS

DC 7.1 General

DC 7.1.1 *Embedded Generators* can have a significant effect on the *s Distribution System* and as a result its *Users*. To enable the to assess the impact that the *Embedded Generator* will have on the *System* they will be required to provide the information outlined in DC 7.2.2.

DC 7.1.2 *Embedded Generators* shall comply with the Distributed Generation Interconnection Technical Guidelines

DC 7.2 Provision of Information

DC 7.2.1 The will use information provided to in the planning of the *Distribution System* and the assessment of connection requirements in terms of the voltage level to which the connection should be made and any other requirements to enable the connection of the generator.

DC 7.2.2 All *Generators* shall provide the following information below:

Data Description	Units
Terminal Volts	kV
Rated kVA	kVA
Rated kVAr	kVAr
Maximum generation	kW
<i>Reactive Power</i> required	kVAr
Type of Generator	Text
Type of Prime Mover	Text
Annual Operating Regime	Text
<i>Fault Level</i> contribution	MVA
Method of Voltage Control	Text
<i>Generator</i> Step-up Transformer Details	Text
Rated Capacity	MVA
Voltage Ratio	Text
Impedance	% on specified base

Data Description	Units
Terminal Volts	kV
Rated kVA	kVA
Rated kVAr	kVAr
Maximum generation	kW
<i>Reactive Power</i> required	kVAr
Type of Generator	Text
Type of Prime Mover	Text

Annual Operating Regime	Text
<i>Fault Level</i> contribution	MVA
Method of Voltage Control	Text
<i>Generator</i> Step-up Transformer Details	Text
Rated Capacity	MVA
Voltage Ratio	Text
Impedance	% on specified base

DC 7.2.3

For all Embedded Generators at a single site equal to or greater than 3MW in aggregate:

Data Description	Units
Rated MW at <i>Registered Capacity</i> for individual units and the <i>Power Station</i>	MW
Rated MW at Minimum Generation for individual units in the <i>Power Station</i>	MW
Auxiliary <i>Active Power</i> demand for individual units and the <i>Power Station</i> at <i>Registered Capacity</i>	MW
Auxiliary <i>Reactive Power</i> demand for individual units and the <i>Power Station</i> at <i>Registered Capacity</i>	MVA _r
Auxiliary <i>Active Power</i> demand for individual units and the <i>Power Station</i> under Minimum Generation	MW
Auxiliary <i>Reactive Power</i> demand for individual units and the <i>Power Station</i> under Minimum Generation	MVA _r
Individual Generator Information	
Rating	MVA
Generator MW/MVA _r Capability Chart	Text
Total Inertia Constant of Prime Mover and Generator	MWsec/MVA
Stator Resistance	% on specified base
Direct axis synchronous, transient and sub-transient reactance	% on specified base
Quadrature axis synchronous, transient and sub-transient reactance	% on specified base
Direct axis synchronous, transient and sub-transient time constants	secs
Quadrature axis synchronous, transient and sub-transient time constants	secs

- DC 7.2.4 Under certain circumstances more or less detailed information than that specified above may be required. Additional data requirements are outlined in the Distribution Connections Code and Distribution Data Registration Code of this Distribution Code.

DC 8 MAINTENANCE STANDARDS

- DC 8.1.1 All Plant and Apparatus on the System shall be operated and maintained in accordance with original equipment manufacturers (OEM) recommendations and Prudent Utility Practice and in a manner that shall not pose a threat to the safety of employees or the public.
- DC 8.1.2 The System Operator shall establish a Distribution System Maintenance Policy which shall be reviewed and approved by the OUR.
- DC 8.1.3 The System Operator shall maintain maintenance records relating to its maintenance of Plant and Apparatus.

DC 9 COMPETENCY OF STAFF

- DC 9.1.1 The System Operator shall have in place training policies that serve to ensure that persons operating, maintaining, testing and controlling the System Operator Transmission and Distribution Systems are competent for the tasks to be undertaken. The policies shall include refresher training at appropriate intervals to maintain the currency of the training.
- DC 9.1.2 All persons operating, maintaining, testing and controlling the System Operator Transmission and Distribution Systems, shall have received appropriate training to ensure competency for the tasks that they shall be undertaking and refresher training at appropriate intervals to maintain the currency of the training.
- The System Operator shall maintain records of training given and issue certificates indicating the areas of competency of the persons trained.
- DC 9.2 Requirement for inspection
- DC 9.2.1 All Plant and Apparatus that shall form part of the Distribution System shall only become part of the Distribution System following inspection and approval by the Government Electrical Inspectorate.

DC 6.0 DISTRIBUTION CONNECTION

DC 6.1 Introduction

- DC 6.1.1 General

This Section of the Distribution Code specify the normal method of connection to the Distribution System and the minimum technical, design and operational criteria which must be complied with by any User or prospective User.

DC 10.1.2 For the purpose of the Distribution Connection User refers to both Embedded Generators and Customers connected to the Distribution System.

DC 10.1.3 In addition, details specific to each User s connection may be set out in a separate Connection/Interconnection Agreement or in some cases a Power Purchase Agreement. The connection conditions set out in this Code are complementary to these Agreements.

DC 10.1.4 All interconnection costs and responsibility shall normally be borne by the User connected to the Distribution System unless specified otherwise by an Interconnection Agreement or policy or as dictated by the OUR.

DC 10.1.5 The JPS Line Extension Policy provides for the process and commercial aspects of managing User connections to the System. This Distribution Connection Code does not serve to cover the commercial arrangements for the payments, deposits or refunds for connections.

DC 10.2 Objective

DC 10.2.1 The objective of the Distribution Connection is to ensure that by specifying minimum technical, design and operational criteria the basic rules for connection to the Distribution System shall enable JPS in its capacity as System Operator to comply with its statutory and Licence obligations.

DC 10.2.2 Distribution Connection applies to the following: JPS in its capacity as Distribution System operator at the Connection Points to the Distribution System;

- a. Customers directly connected to the Distribution System, and
- b. Generators connected to the Distribution System (Embedded Generators).

DC 11.0 METHOD OF CONNECTION

DC 11.1 General

DC 11.1.1 The System Operator in consultation with the User shall determine the optimum connection method on the basis of several technical and economic factors including:

- a. Geographical considerations including proximity to the Distribution System;
- b. Maximum Demand to be supplied;
- c. Generating Facility MW capacity;
- d. Supply voltage;
- e. Reliability considerations;
- f. Standby or auxiliary power requirements;

- g. Substation configuration; and
- h. Costs.

- DC 11.1.2 The studies to be undertaken to determine the works required to facilitate a connection are those outlined in the Distribution Planning Code and serve to ensure that for any new connection the proposed customer(s) and all existing Customers receive a supply within the statutory parameters.
- DC 11.1.3 Multiple Connections Points shall not be provided to Connection Sites.
- DC 11.1.4 No interconnection of the Systems from two different Connection Points shall be allowed unless specifically detailed in the Connection Agreements and appropriate safeguards put in place.
- DC 11.1.5 It should be noted that it shall not be technically or economically practicable to achieve uniformity of the method of connection. In all cases, Prudent Utility Practice shall influence the method adopted.
- DC 11.1.6 The provisions relating to connection to the Distribution System are contained in the Connection Agreement with a User and include provisions relating to both the submission of information and reports relating to compliance with the relevant Connection Conditions for that User, Safety Rules, commissioning and periodic testing programmes, Operation Diagrams, approval to connect, any Power Purchase Agreement and the Terms and Conditions of Service.

DC 11.2 Connections at Low Voltage

- DC 11.2.1 For low voltage connections, supply shall be provided at:
- a. Single phase 110V;
 - b. Single Phase 110/220V; or,
 - c. Three phase 220V Delta
 - d. Three Phase 415/240V Star dependant on User requirements and availability in the location required.
- DC 11.2.2 The information required for low voltage connections shall be a minimum of:
- a. Customer name, address and contact details
 - b. Location of proposed connection.
 - c. Type of connection (Residential, Commercial, Industrial)
 - d. Capacity required (if not known then type of use appliances etc)
 - e. Identification of any large motors or welders.

- DC 11.2.3 Normal connections shall be provided by up to three single phase pole mounted transformers appropriately connected. Transformer ratings and connections shall be in accordance with Engineering Standard ES-1300-2.8.
- DC 11.2.4 Connections may be provided by ground mounted three phase pad mount transformers where specific User requests are made.
- DC 11.2.5 The normal method of low voltage supply will utilise overhead lines. The connection will be a single connection of the appropriate number of phases. No alternative is normally provided. Underground cables may be used in the central business area or due to specific User request. The charging policy outlined in the JPS Standard Terms and Conditions of Service approved by the OUR shall apply to requests for non-standard connection.
- DC 11.2.6 The connection will be made to an appropriate point on the customer premises approved by the Government Electrical Inspector. The customer may be required to provide for the connection from this Connection Point to the Metering Point.
- DC 11.2.7 The Metering Points shall be accommodated in metering facilities provided by the Customer. These metering facilities shall comply fully with the requirements of Engineering Bulletin No. TSD 007/3 Metering Facility Policy and the Standard Terms and Conditions of Service.
- DC 11.2.8 The distance between the Connection Point and the Metering Point should be minimized. It is also desirable that any such connection between the Connection Point and the Metering Point is secured to prevent unauthorised access.

DC 11.3 Connection at Medium Voltage (MV)

- DC 11.3.1 For connections given at MV level, then prior to the Completion Date under the Connection Agreement, the following, (as applicable) may be requested to be supplied by the User to the System Operator:
- a. Updated Planning Code data with any estimated values assumed for planning purposes confirmed or, where practical, replaced by validated actual values and by updated estimates for the future and by updated forecasts for items such as Demand;
 - b. Details of the Protection arrangements and settings including
 - c. Protection and Control single line diagrams;
 - d. Copies of all Safety Rules and Local Safety Instructions applicable at Users Sites which shall be used at the System Operator/User interface;

- e. Information to enable the System Operator to prepare Site Responsibility Schedules on the basis of the provisions set out in Appendix A;
- f. An Operation Diagram for all MV Apparatus on the User side of the Connection Point;
- g. The proposed name of the User Site (which shall not be the same as, or confusingly similar to, the name of any JPS Site or of any other User Site);
- h. A list of Safety Co-ordinators;
- i. A list of the telephone numbers for Joint System Incidents at which senior management representatives nominated for the purpose can be contacted and confirmation that they are fully authorised to make binding decisions on behalf of the User;
- j. A list of managers who have been duly authorised to sign Site Responsibility Schedules on behalf of the User; and
- k. Information to enable System Operator to prepare Site Common Drawings.

DC 11.3.2 Such connections shall normally be overhead and provided from a radial feeder. The connection shall not normally be designed to provide a switched alternative supply for faults on the Distribution System that supplies the Customer. The Service Area concept is used as outlined in the Planning Code to determine appropriate network configuration and any reinforcement required to enable the connection to be accommodated onto the System. The connection shall be designed to comply with the Guaranteed and Overall Standards of restoration.

DC 11.3.3 Alternative supply arrangements may be requested based on either switched alternative, (Manual or Automatic) or parallel circuit supply. These may be provided at the discretion of the System Operator based on technical considerations. The appropriate charging policy in force at the time shall apply to requests for non standard connection.

DC 11.3.4 In some cases (for example Subdivisions) a single connection to a premise shall be made and multiple Metering Points shall be installed to meter individual Customers. In these cases meters shall only be installed to provide supplies to electrically isolated User Systems.

DC 11.4 Connection of Generators

DC 11.4.1 Generator connections shall comply with the requirements of the Generation Code.

DC 11.4.2 In accordance with the Generation Code, Generators with a rated capacity of 10MW or below may be connected to the Distribution System where technical conditions allow. The design of connections between any Embedded Generating Unit and the Distribution System shall be as set out in the Generation Code. The design of connections between the Distribution System and Customers shall be consistent with the Licence.

- DC 11.4.3 The voltage of connection shall be at the discretion of the System Operator and based on the relevant studies as described in the Planning Code.
- DC 11.4.4 The connection of generators to the Distribution System shall be consistent with the OUR Document Ele 2005/08.1 Guidelines for the addition of Generating Capacity to the Public Electricity Supply System (2006) and the JPS Guide to the Interconnection of Distributed Generation documents as amended from time to time.
- DC 11.4.5 Embedded Generation Units shall be required, as a minimum, to meet following performance standards:
- Sustained Operation at any Load within the loading limits and within the System frequency range 49.5 Hz to 50.5 Hz;;
 - Emergency Operation at any Load within the loading limits within the System frequency range 48.0 Hz to 52.5 Hz during exceptional conditions;
 - Maintain normal rated output at the voltages specified in DC 2.2.1.
 - Sustained Operation at the rated Power Factor set out in the Interconnection Agreement.
- DC 11.4.6 Embedded Generation Units shall not normally be required to have Black Start facilities.
- DC 11.4.7 Embedded Generation units shall not normally be permitted or required to generate when the part of the Distribution System to which they are connected is disconnected from the Transmission System. Any such permission or requirement shall be detailed in the Interconnection Agreement along with detailed requirements for the voltage and frequency control.

DC 11.5 Variable Renewable Power Plant (VRPP)

Although this code is for all Variable Renewable Plants, the code addresses in greater detail Wind and Photovoltaic technical aspects, which were prevalent at the time of writing this code. The code will be updated as needed to address concerns of other technologies.

Voltage Relay Requirements

Table DC 3.2.1 Voltage relay requirements

Voltage Condition (% of $V_{nominal}$)	Maximum Time to Disconnect
$V < 50\%$	0.16 sec (8 cycles)
$50\% < V < 88\%$	2 secs (100 cycles)
$110\% < V < 120\%$	1 sec (50 cycles)
$V > 120\%$	0.16 sec (8 cycles)

DC 11.6 Frequency Criteria

- DC 11.6.1 Maintain frequency within the limit of 50 Hz \pm 0.2 Hz, with a deadband of 30 mHz.
Outside of this range the VRPP is required to trip off the JPS Distribution network.

DC 11.6.2 Power Factor

The VRPP facility shall be capable of operating in the power factor range of 0.9 lagging to 0.95 leading. Power factor correction techniques may be required.

DC 11.6.3 Voltage Flicker

Voltage Flicker is the rapid change in voltage that distorts or interferes with the normal sinusoidal voltage waveform of the Distribution Network. Such interference is a product of a relatively large current inrush when Apparatus, such as a large motor, is suddenly switched on, or resulting from the sudden increased Demand from for example welding equipment.

The current inrush acting over the Network impedance results in a voltage dip (sudden fall) and/or voltage swell (sudden rise), therefore the Voltage Flicker, as well as when the Apparatus concerned is off-loaded. VRPPs are not allowed to introduce significant Voltage Flicker on the Distribution Network as measured at the Point of Interconnection. In setting and analysing Voltage Flicker limits, the appropriate standards should be applied.

DC 11.6.4 VRPP Harmonic Distortion

Harmonics are waveforms that distort the fundamental 50 Hz wave. The limits, assessment, planning, testing and measurement for harmonic distortion levels are well defined and be found in a number of internationally accepted standards such as the IEEE 1547, its IEC equivalent and other internationally accepted standards.

If harmonics that exceed above listed standards result from the operation of the VRPPs electrical equipment which are verified by testing, the VRPP system shall be disconnected until the harmonics are mitigated by the VRPP in accordance with the above listed standards.

In the situation where current harmonic measurements are required, the current harmonic limits shall be derived from the harmonic voltage limits in accordance with the appropriate standards.

Additionally, and in instances where several VRPPs are located in the vicinity of each other, the total harmonic contribution shall not exceed the above requirements.

DC 11.6.5 VRPP Phase Imbalance & Negative Sequence Handling

The negative sequence current control would enable the reduction or even total elimination of the negative sequence short circuit current in many modern wind turbines/solar inverters. During unbalanced faults, e.g. line-to-line fault, full negative sequence current suppression control would lead to a line-to-line short circuit current in the range of the current of the loads connected to the grid or even to zero under no load conditions. The conventional protection devices would thus have difficulty to sense and clear the fault.

In order to overcome this problem, VRPP are to be required to inject a certain level of inductive negative sequence short circuit current proportional to the negative sequence voltage. This will result not only in higher short circuit current but also in the reduction of the negative sequence voltage and thus better phase voltage symmetry.

Under normal operation, the maximum negative phase sequence component of the phase voltage of the power system should remain below 1%. A control measures can be implemented to support this requirement, while adhering to the relevant standards, should be applied.

DC 11.6.6 VRPP Anti-Islanding Requirements

Under no conditions is the VRPP permitted to be in an islanded situation with any part of the Distribution System. Islanding occurs when part of the Distribution System, to which the VRPP is connected, during emergency conditions, becomes detached from the rest of the Distribution System as described in ANSI/IEEE Std. 1547-2003. In order to eliminate this risk, the following shall be implemented:

1. The VRPP must be capable of tripping off line in accordance with JPS, upon loss of main power (LoM) from the grid. It is the responsibility of the VRPP to incorporate the most appropriate technique or combination of techniques to detect a loss of main power event in its protection systems to achieve disconnection of the VRPP from the Distribution System. This will be based on knowledge of the VRPP, site and network load conditions.
2. If no facilities exist for the subsequent re-synchronization with the rest of the Distribution System then the VRPP shall under JPS instruction ensure that the VRPP is disconnected for re-synchronization.

DC 11.6.7 VRPP Data Requirements& Studies

In addition to the studies outlined in DC 4 above and due to the intermittent nature of the VRPP, additional power system studies as outline below but not limited to should be done:

- Voltage Flicker
- Harmonic Analysis
- Phase Imbalance
- Feeder Stability

DC 12 POWER QUALITY STANDARDS

DC 12.1 Power Quality

DC 12.1.1 For the purpose of this Article, Power Quality shall be defined as the quality of the voltage, including its frequency and the resulting current that is measured in the Distribution System during normal conditions. The standards applicable to Power Quality are set out in the System Operator's Power Quality Policy and System Operation Policy No 2 Operational Standards of Security of Supply which shall be approved by the OUR and amended from time-to-time.

DC 12.1.2 A Power Quality problem exists when at least one of the following conditions is present and significantly affects the normal Operation of the System:

- a. The System Frequency has deviated from the nominal value of 50 – 0.2Hz;
- b. Voltage magnitudes are outside their allowable range of variation;
- c. Harmonic Frequencies are present in the System;
- d. The magnitude of the phase voltages are unbalanced;
- e. The phase displacement between the voltages is not equal to 120 degrees;
- f. Voltage Fluctuations cause Flicker that is outside the allowable Flicker Severity limits; or
- g. High-frequency Over-voltages are present in the Distribution System.

DC 12.2 Frequency Variations

DC 12.2.1 The frequency of the Distribution System shall be consistent with JPS System Operation Policy No.2 and have a normal frequency of 50Hz – 0.2Hz and shall be controlled within the limits of 49.5 and 50.5 Hz.

DC 12.2.2 Under some conditions the system frequency could rise to 52.5 Hz or fall to 48.0 Hz and shall be taken into account in the design of Plant and Apparatus.

DC 12.3 Power Factor

DC 12.3.1 The User shall maintain power factor at the Connection Point to the Distribution System consistent with JPS Standard Terms and Conditions of Service as amended from time to time.

DC 12.3.2 The System Operator shall correct Reactive Power Demand on feeders and substations to a level that will economically reduce technical losses and maintain a minimum power factor of 0.95 lagging on the Distribution System.

DC 12.4 Voltage Variations

- DC 12.4.1 The voltage on the 24 kV, 13.8kV and 12 kV parts of the Distribution System at each Connection Site with a User shall normally remain within –5% of the nominal value.
- DC 12.4.2 The voltage on the lower voltage side of transformers at Connection Sites with Users shall be consistent with the JPS Standard Terms and Conditions of Service as amended from time to time.

DC 12.5 Voltage Waveform Quality

- DC 12.5.1 All Plant and Apparatus connected to the Distribution System, and that part of the Distribution System at each Connection Site, should be capable of withstanding distortions of the voltage waveform in respect of harmonic content and phase unbalance as outlined in the System Operator Power Quality Policy.

DC 12.6 Exceptional Conditions

- DC 12.6.1 Some events such as system faults which involve the Transmission System or a generating plant or faults that lead to loss of more than one generating set in the System or where a Significant Incident has occurred or during constrained operating conditions such as light load conditions and shortage of Active/Reactive Power, can result in variations outside the normal power quality standards as outlined in section DC 12 and its subsections. During these events, the System Operator shall be relieved of its obligation to comply with the System conditions referenced in the aforementioned.

DC 13.0 PLANT AND APPARATUS RELATING TO CONNECTION SITES

DC 13.1 General Requirements

- DC 13.1.1 All Plant and Apparatus relating to the Users/System Operator at the Connection Point, shall be compliant with the following requirements in DC 13.0 and its subsections.

DC 13.2 Substation Plant and Apparatus

- DC 13.2.1 All circuit breakers, switch disconnectors, Earthing Devices, power transformers, Voltage Transformers, reactors, Current Transformers, surge

arresters, bushings, neutral Equipment, capacitors, line traps, coupling devices, external insulation and insulation co-ordination at the User/JPS Connection Point shall be constructed, installed and tested in accordance with the current edition at the time of construction of the following codes and standards, or their international equivalents and Prudent Utility Practice:

ACI	American Concrete Institute
ANSI	American National Standards Institute
ASCE	American Society for Civil Engineers
ASME	American Society for Mechanical Engineers
ASNT	American Society for Non-Destructive Testing
ASTM	American Society for Testing Materials
AWS	American Welding Society
BSJ	Bureau of Standards Jamaica
IEC	International Electro-technical Commission
IEEE	Institute of Electrical and Electronic Engineers
ISO	International Organization for Standardization
NBCJ	National Building Code of Jamaica
NEC	National Electric Code
NEMA	National Electric Manufacturers Association
NEPA	Natural Environmental and Planning Agency (Jamaica)
NESC	National Electric Safety Code
NETA	National Electric Testing Association
NFPA	National Fire Protection Association
OSHA	Occupational Safety and Health Administration
SSPC	Steel Structures Painting Council
UL	Underwriters Laboratory

- DC 13.2.2 Plant and Apparatus shall be designed, manufactured and tested in premises certified in accordance with the quality assurance requirements of ISO 9001 or equivalent.

DC 13.3 Generator Connection Points

- DC 13.3.1 The requirements for the design of Connection Points between Generators and the System Operator are set out in the Generation Code. For information the following sections are extracted from the Generation Code, minor wording modification have been made to refer to Distribution connections.

- DC 13.3.2 The Generation Code states that the voltage level at which the Generating Unit(s) are connected to the Transmission or Distribution System shall be dependent on but not limited to the size and number of units and the other factors that determine the Connection Point. Subject to other technical considerations, Generating Units with a Rated Capacity of 10 MW or above shall be connected to the Transmission System at 69 kV or 138 kV. Generating Units with a Rated Capacity of below 10 MW may be connected to either the Transmission System at 69 kV or 138 kV or the primary Distribution System at 24 kV or less. The chosen method of connection shall be determined by the System Operator on the grounds of system security, stability and safety.

- DC 13.3.3 All Substations shall have the capability to disconnect or separate, from the Distribution System, any line and/or Generating Unit which is interconnected to the Substation.

- DC 13.3.4 The Generation Code states that the method of connection of Generating Unit(s) shall be determined on the basis of several technical and economic factors which include:

- a. Proximity to System Grid;
- b. Generating Unit MW rating or Generating Facility MW capacity;
- c. Supply voltage;
- d. Reliability considerations;
- e. Auxiliary power supply;
- f. Substation configuration; and
- g. Costs.

It should be noted that it will not be technically or economically practicable to achieve uniformity of the method of connection. In all cases however, Prudent Utility Practice shall influence the method adopted.

DC 13.4 Interconnection Connection Points to Transmission System

- DC 13.4.1 The Distribution System connection to the Transmission System shall comply with section TC 4.4 of the Transmission Connection code.

DC 13.5 Protection Requirements

DC 13.5.1 The protective Systems to be applied to Generating Units are set out in the Generation Code and shall, as a minimum, have protection against the following incidents unless specifically agreed with the System Operator:

- a. Loss of excitation;
- b. Under excitation;
- c. Unbalanced load Operation;
- d. Stator phase faults and earth faults;
- e. Reverse power protection;
- f. Main Generating Unit Step Up transformer phase and earth faults, HV and LV;
- g. Station service transformer phase and earth faults, HV and LV;
- h. Transformer tank sudden pressure;
- i. Backup protection in the event that external phase and earth faults are not cleared by remote protection System;
- j. Backup protection in the event of circuit breaker failure to operate;
- k. Generating Unit over and under frequency;
- l. Generator over speed;
- m. Stator over temperature;
- n. Rotor over temperature; and
- o. Restricted earth fault;

DC 13.5.2 All protection Systems and settings shall be in accordance with the System Operators protection policy as contained in the document JPS Protective Relaying Philosophy & Practices .

DC 13.5.3 Protection of the Distribution System and Customers directly supplied from the Distribution System shall be designed, coordinated and tested to achieve the desired level of speed, sensitivity and discrimination to isolate the affected parts of the System while ensuring that the section isolated does not include parts of the System not directly affected by the fault, as far as possible in accordance with Prudent Utility Practice, and maintaining supplies to the remainder of the System within design parameters.

DC 13.5.4 The System Operator shall be solely responsible for the protection of the Distribution System. Users and Embedded Generators shall be solely responsible for the protection of the User Systems on their side of the Connection Point.

DC 13.5.5 Users shall design their protection System to ensure that no other User shall be affected for faults on their System.

DC 13.5.6 The reliability of the protection scheme to initiate the successful tripping of the Circuit Breakers that are associated with the faulty Equipment shall be consistent with Prudent Utility Practice.

DC 13.5.7 The System Operator may require specific Users to provide other protection schemes, designed and developed to minimize the risk and/or impact of disturbances on the Grid.

DC 13.5.8 Where as part of the Connection Agreement, a User is required to provide Demand disconnection as part of the System Operators under frequency management process that includes the automatic disconnection of substations and feeders then the relays shall comply with the requirements of Appendix B.

DC 14 SITE RELATED CONDITIONS

DC 14.1 General

DC 14.1.1 In the absence of agreement between the parties to the contrary, construction, commissioning, control, operation and maintenance responsibilities follow ownership.

DC 14.2 Responsibilities for Safety

DC 14.2.1 Before connection to the Distribution System at the MV level the System Operator and the User shall enter into a written agreement as to the Safety Rules to be used for work on Plant and/or Apparatus at the Connection Point

DC 14.3 Site Responsibility Schedules

DC 14.3.1 In order to inform site operational staff and the System Operator s Control Engineers of agreed responsibilities for Plant and/or Apparatus at the Operational Interface at the MV level, a Site Responsibility Schedule shall be produced for System Operator and Users with whom they interface.

DC 14.3.2 The format, principles and basic procedure to be used in the preparation of Site Responsibility Schedules are set down in Appendix A. These documents should be incorporated into the Connection (Interconnection) Agreements.

DC 14.4 Operation Diagrams

DC 14.4.1 An Operation Diagram shall be prepared for each Connection Site at which a Connection Point is at the MV level in accordance with Appendix C. Users shall provide Operation Diagrams of their Apparatus to the System Operator in a suitable form as specified by the System Operator.

DC 14.4.2 The Operation Diagram shall include all MV Apparatus and the connections to all external circuits and incorporate numbering, nomenclature and labelling, as set out in the Operations Code. At those Connection Sites where SF6 gas-insulated metal

enclosed switchgear and/or other SF6 gas-insulated MV Apparatus is installed, those items must be depicted within an area delineated by a chain dotted line which intersects SF6 gas-zone boundaries. The nomenclature used shall conform to that used on the relevant Connection Site and circuit.

- DC 14.4.3 The Operation Diagram (and the list of technical details) is intended to provide an accurate record of the layout and circuit interconnections, ratings and numbering and nomenclature of MV Apparatus and related Plant.

DC 14.5 SF6 Gas Zone Diagrams

- DC 14.5.1 An SF6 Gas Zone Diagram shall be prepared for each Connection Site at which a Connection Point exists where SF6 gas-insulated switchgear and/or other SF6 gas-insulated MV Apparatus is utilised. This is to ensure that responsibility for the SF6 gas is documented and is particularly important as the chamber containing the insulating medium can extend beyond the Connection Point. They shall use, where appropriate the graphical symbols shown in Appendix C. The nomenclature used shall conform with that used in the relevant Connection Site and circuit.

DC 14.6 Preparation of Operation and SF6 Gas Zone Diagrams

- DC 14.6.1 Each party shall provide to the other party an Operation Diagram and details of the SF6 Gas Zones on its side of the Connection Point. The party owning the Connection Site is then responsible for the preparation of a composite Operation Diagram and SF6 Gas Zone diagrams for the site.

DC 14.7 Changes to Operation and SF6 Gas Zone Diagrams

- DC 14.7.1 When either party has decided that it wishes to install new MV Apparatus or it wishes to change the existing numbering or nomenclature of its MV Apparatus at a Connection Point it shall one month prior to the installation or change, send to the other party a revised Operation Diagram of that Site, incorporating the new MV Apparatus to be installed and its numbering and nomenclature or the changes, as the case may be.

DC 14.8 Validity

- DC 14.8.1 The composite Operation Diagram prepared by System Operator or the User shall be the definitive Operation Diagram for all operational and planning activities associated with the Connection Site. If a Dispute arises as to the accuracy of the composite Operation Diagram, a meeting shall be held at the Connection Site, as soon as reasonably practicable, between the System Operator and the User, to endeavour to resolve the matters in Dispute.

DC 14.9 Site Common Drawings

- DC 14.9.1 Site Common Drawings shall be prepared for each Connection Site which is connected at the MV level and shall include Connection Site layout drawings, electrical layout drawings, common Protection/control drawings and common services drawings.
- DC 14.9.2 In the case of a User Connection Site, the System Operator shall prepare and submit to the User, Site Common Drawings for the System Operator side of the Connection Point in accordance with the requirements of the Connection Agreement.
- DC 14.9.3 The User shall then prepare, produce and distribute, using the information submitted by the System Operator, Site Common Drawings for the complete Connection Site in accordance with the requirements of the Connection Agreement.
- DC 14.9.4 In the case of a System Operator Site, the User shall prepare and submit to the Grid Operator Site Common Drawings for the User side of the Connection Point in accordance with the requirements of the Connection Agreement.
- DC 14.9.5 The System Operator shall then prepare, produce and distribute, using the information submitted by the User, Site Common Drawings for the complete Connection Site in accordance with the requirements of the Connection Agreement.

DC 14.10 Changes to Site Common Drawings

- DC 14.10.1 When the System Operator or a User becomes aware that it is necessary to change any aspect of the Site Common Drawings at a Connection Site it shall notify the other Party and amend the common site drawings in accordance with the procedure set out in DC 10.9.
- DC 14.10.2 If the change can be dealt with by notifying the other Party in writing of the change and for each party to amend its copy of the Site Common Drawings then each party shall so amend.

DC 14.11 Validity of Site Common Drawings

- DC 14.11.1 The Site Common Drawings for the complete Connection Site prepared by the User or the System Operator as the case may be, shall be the definitive Site Common Drawings for all operational and planning activities associated with the Connection Site. If a Dispute arises as to the accuracy of the Site Common Drawings, a meeting shall be held at the site, as soon as reasonably practicable, between the System Operator and the User, to endeavour to resolve the matters in Dispute.

DC 14.12 Access

- DC 14.10.1 The provisions relating to access to System Operator Sites by Users, and to User Sites by the System Operator are set out in each Connection Agreement with the System Operator and each User and/or Standards Terms and Conditions of Service.
- DC 14.10.2 In addition to those provisions, where a System Operator Site contains exposed MV conductors, unaccompanied access shall only be granted to individuals holding an Authority for Access issued by the System Operator.

DC 14.13 Maintenance Standards

- DC 14.13.1 All Plant and Apparatus at the Connection Point shall be operated and maintained in accordance with Prudent Utility Practice and in a manner that shall not pose a threat to the safety of any personnel or cause damage to the Plant and Apparatus of the System Operator or the User.
- DC 14.13.2 The User shall maintain a log containing the test results and maintenance records relating to its Plant and Apparatus at the Connection Point and shall make this log available when requested by the System Operator.
- DC 14.13.3 The System Operator shall maintain a log containing the test results and maintenance records relating to its Plant and Apparatus at the Connection Point and shall make this log available when requested by the User.
- DC 14.13.4 Either Party shall have the right to inspect the test results and maintenance records relating to the other Party's Plant and Apparatus at any time.

DCC 11 COMMUNICATIONS AND CONTROL

- DC 15.1.1 In order to ensure control of the Distribution System, telecommunications between User(s) and the System Operator must be established if required by the System Operator.
- DC 15.1.2 Control Telephony is the method by which a Users Responsible Engineer/Operator and the System Operator's Control Engineers speak to one another for the purposes of control of the Distribution System in both normal and emergency operating conditions.
- DC 15.1.3 At any Connection Point where the Users telephony Equipment is not capable of providing the required facilities or is otherwise incompatible with the System Operators control telephony, the User shall install appropriate telephony Equipment

to the specification of the System Operator. Details of, and relating to, the control telephony required shall be set out in the Connection Agreement.

- DC 15.1.4 The System Operator shall provide Supervisory Control And Data Acquisition (SCADA) outstation interface Equipment. The User shall provide such voltage, current, frequency, Active Power and Reactive Power measurement outputs and Plant status indications and alarms to the System Operator SCADA outstation interface Equipment as required by the System Operator in accordance with the terms of the Connection Agreement. The manner in which information is required to be presented to the outstation Equipment is set out in Appendix D.

APPENDIX A

SITE RESPONSIBILITY SCHEDULES

DCC APPENDIX A - SITE RESPONSIBILITY SCHEDULES

At all Connection Sites the following Site Responsibility Schedules shall be drawn up using the pro-forma attached or with such variations as may be agreed between the System Operator and Users, and in the absence of agreement the pro-forma attached shall be used: i) Schedule of MV Apparatus ii) Schedule of Plant, LV Apparatus, services and supplies; iii) Schedule of telecommunications and measurements Apparatus.

Other than at Generating Unit and Power Station locations, the schedules referred to in (ii) and (iii) above may be combined.

Each Site Responsibility Schedule for a Connection Site shall be prepared by the System Operator in consultation with other Users at least 2 weeks prior to the Completion Date under the Connection Agreement for that Connection Site. Each User shall, in accordance with the timing requirements of the Connection Agreement, provide information to the System Operator to enable it to prepare the Site Responsibility Schedule.

- i. Each Site Responsibility Schedule shall detail for each item of Plant and Apparatus;
- ii. Item of Equipment Using the agreed Numbering and Nomenclature in accordance with DOC 10.
- iii. Equipment Owner This identifies the party that owns the Equipment under common law;
- iv. Safety Rules This identifies whether the System Operator s or User s Safety Rules shall be applied to the Equipment.
- v. Operational Procedures This identifies whether System Operator or Users personnel shall be responsible for Operations on the Equipment. Note that if this is System Operator, it does not preclude the System Operator from authorising Users personnel from acting on it behalf and vice versa.
- vi. Control Responsibility This identifies whether the System Control used shall be the System Operators or the Users.
- vii. Maintenance Responsibility This identifies whether the System Operator or the User is responsible for the inspection and maintenance of the Equipment.
- viii. vii) Access and Security This identifies whether the System Operator or the User shall be responsible for the establishment and maintenance of perimeter fencing and any manned access security for the protection of the public and to prevent malicious entry. Access to operational areas of the site shall be restricted to persons duly authorised in accordance with the prevailing Safety Rules.

The MV Apparatus Site Responsibility Schedule for each Connection Site must include lines and cables emanating from the Connection Site.

Every page of each Site Responsibility Schedule shall bear the date of issue and the issue number.

When a Site Responsibility Schedule is prepared it shall be sent by System Operator to the Users involved for confirmation of its accuracy.

The Site Responsibility Schedule shall then be signed on behalf of System Operator by the Manager responsible for the area in which the Connection Site is situated and on behalf of each User involved by its Responsible Manager, by way of written confirmation of its accuracy. Once signed, two copies shall be distributed by System Operator, not less than two weeks prior to its implementation date, to each User which is a party on the Site

Responsibility Schedule, accompanied by a note indicating the issue number and the date of implementation.

Attachment to Appendix A: PRO FORMA for SITE RESPONSIBILITY SCHEDULE

Item o f Equipment	Equipment Owner	Policy Rules	Operational Procedures	Control Responsibility	Maintenance Responsibility	Access and Security	Comments

Signed on behalf of the System Operator

Date ..

Signed on behalf of the User

APPENDIX B

TECHNICAL REQUIREMENTS FOR UNDER FREQUENCY RELAYS

DCC APPENDIX B - TECHNICAL REQUIREMENTS FOR UNDER FREQUENCY RELAYS

The Connection Agreement shall specify the manner in which Demand at the User Site, subject to Automatic Load Disconnection (separate from the System Operators underfrequency load shedding scheme), shall be actuated by under-frequency relays.

- 1) Under Frequency Relays shall have a frequency setting range of 46.0 to 52.0Hz and be suitable for Operation from a nominal AC input of 63.5, 110 or 240V.

The following general parameters on the requirements of approved Frequency Relays for automatic installations is given as an indication to the provisions that may be included in a Connection Agreement:

- a. Frequency settings: 46-52Hz in steps of 0.01Hz;
 - b. Measurement period: Within a minimum selectable settings range of 3 to 7 cycles;
 - c. Operating time: Between 100 and 160ms dependent on measurement period setting;
 - d. Voltage lock-out: 20 to 90% of nominal voltage;
 - e. Facility stages: Four stages of frequency Operation;
 - f. Output contacts: Two output contacts per stage.
- 2) The voltage supply to the Under Frequency Relays shall be derived from the Transmission System at the supply point concerned so that the frequency of the Under Frequency Relays input voltage is the same as that of the primary System. This requires either:
 - a. the use of a secure supply obtained from Voltage Transformers directly associated with the Transmission System interconnection transformer(s) concerned, the supply being obtained where necessary via a suitable automatic voltage selection scheme; or
 - b. the use of the substation 110V phase-to-neutral selected auxiliary supply, provided that this supply is always derived at the Connection Point concerned and is never derived from a standby Generator or from another part of the User System.

- 3) The tripping facility should be engineered in accordance with the following reliability considerations:
 - a. Dependability: Failure to trip at any one particular Demand shedding point shall not harm the overall Operation of the scheme. However, many failures would have the effect of reducing the amount of Demand under low frequency control.
 - b. Outages: Low frequency Demand shedding schemes shall be engineered such that the amount of Demand under control is as specified by the System Operator and is not reduced unacceptably during Equipment outage or maintenance conditions.

APPENDIX C

PROCEDURES RELATING TO OPERATION DIAGRAMS

DC xx APPENDIX C - PROCEDURES RELATING TO OPERATION DIAGRAMS

Basic Principles

Where practicable, all the MV Apparatus on any Connection Site shall be shown on one Operation Diagram. Provided the clarity of the diagram is not impaired, the layout shall represent as closely as possible the geographical arrangement on the Connection Site.

- a. Where more than one Operation Diagram is unavoidable, duplication of identical information on more than one Operation Diagram must be avoided.
- b. The Operation Diagram must show accurately the current status of the Apparatus, e.g. whether commissioned or decommissioned. Where decommissioned, the associated switchbay shall be labelled "spare bay".
- c. Provision shall be made on the Operation Diagram for signifying approvals, together with provision for details of revisions and dates.

Apparatus to be shown on Ownership Diagrams

1. Busbars
2. Circuit Breakers
3. Disconnect (Isolator) and Switch Disconnectors (Switching Isolators)

4. Disconnectors (Isolators) - Automatic Facilities
5. Bypass Facilities
6. Earthing Switches
7. Maintenance Earths
8. Overhead Line Entries
9. Overhead Line Traps
10. Cable and Cable Sealing Ends
11. Generating Unit
12. Generator Transformers
13. Generating Unit Step Up Transformers, Station Transformers, including the lower voltage circuit-breakers
14. Synchronous Compensators
15. Static VAR Compensators
16. Capacitors (including Harmonic Filters)
17. Series or Shunt Reactors
18. Grid Transformers
19. Tertiary Windings
20. Earthing and Auxiliary Transformers
21. Three Phase VTs
22. Single Phase VT & Phase Identity
23. High Accuracy VT and Phase Identity
24. Surge Arrestors/Diverter
25. Neutral Earthing Arrangements on MV Plant
26. Fault Throwing Devices
27. Quadrature Boosters
28. Arc Suppression Coils
29. Current Transformers (where separate Plant items)
30. Wall Bushings

Use of Approved Graphical Symbols

All graphical symbols to be used in Operation Diagrams shall be approved by the System Operator.

APPENDIX D

SCADA INTERFACING

DCxxx APPENDIX D - SCADA INTERFACING

This Appendix sets out the technical requirements for connections to the System Operator's Supervisory Control and Data Acquisition System outstation in terms of electrical characteristics.

GENERAL REQUIREMENTS

In all cases signals shall be arranged such that the level of electrical interference does not exceed those defined in IEC 870-2-1: "Telecontrol Equipment and Systems - Operating Conditions - Power Supply and Electromagnetic Compatibility" and IEC870-3: "Telecontrol Equipment and Systems - Specification for Interfaces (Electrical Characteristics)".

Digital Inputs

Digital inputs cover both single and double points for connection to digital input modules on the System Operator's outstation Equipment. The Equipment contacts shall be free of potential, whereas the input circuitry of the outstation are common to the negative 48 volt potential.

Single Points

Single point inputs must be used for alarms and where single contact indications are available. The off (contact open or 0) state is considered to be the normal state and the on (contact closed or 1) state the alarm condition.

Double Points

Double points are used to indicate primary Plant states by the use of complementary inputs for each Plant item. Only the "10" and "01" states are considered valid with the "00" and "11" states considered invalid. The "10" state is considered to be the normal or closed state.

Energy Meter Inputs

Energy meter input pulses for connection to pulse counting input modules on the System Operator's outstation Equipment must operate for a minimum of 100ms to indicate a predetermined flow of MWh or MVARh. The contact must open again for a minimum of 100ms. The normal state of the input must be open.

Analogue Inputs

Analogue inputs for connection to analogue input modules on the System Operator's outstation Equipment must all be electrically isolated with a two wire connection required. Signals shall be in the form of 4-20mA (or other range to be agreed between the User and the System Operator) for both unidirectional and bi-directional measured values. Signal converters shall be provided as necessary to produce the correct input signals.

Command Outputs

All command outputs for connection to command output modules on the System Operator's outstation Equipment switch both the 0 volts and -48 volts for a period of 2.5 seconds at a maximum current of 1 amp. All outputs shall be electrically isolated with a two wire connection to control interposing relays on the Plant to be operated.

DC 16 NUMBERING AND NOMENCLATURE

DC 16.1 Introduction

DC 16.1.1 Distribution Code Section 16 (DC 16) sets out the responsibilities and procedures for notifying the relevant owners of the numbering and nomenclature of Apparatus at Connection Points.

DC 16.1.2 The numbering and nomenclature of Apparatus shall be included in the Operation Diagram prepared for each site having an Ownership Boundary.

DC 16.2 Objectives

DC 16.2.1 The prime objective embodied in DC 16 is to ensure that at any site where there is an Ownership Boundary every item of Apparatus has numbering and/or nomenclature that has been mutually agreed and notified between the owners concerned to ensure, so far as is reasonably practicable the safe and effective Operation of the Systems involved and to reduce the risk of error.

DC 16.3 Procedure

DC 16.3.1 New Apparatus

When the System Operator or a User intends to install Apparatus on a site having an Ownership Boundary the proposed numbering and/or nomenclature to be adopted for the Apparatus must be notified to the other owners. The notification shall be made in writing to the relevant owners and shall consist of an Operation Diagram incorporating the proposed Apparatus to be installed and its proposed numbering and/or nomenclature. The notification shall be made to the relevant owners at least three months prior to the proposed installation of the Apparatus.

The relevant owners shall respond in writing within one month of the receipt of the notification confirming both receipt and whether the proposed numbering and/or nomenclature is acceptable or, if not, what would be acceptable.

In the event that agreement cannot be reached between the System Operator, and the other owners, the System Operator, acting reasonably, shall have the right to determine the numbering and nomenclature to be applied at that site.

DC 16.3.2 Existing Apparatus

The System Operator and/or every User shall supply the other Party on request with details of the numbering and nomenclature of Apparatus on sites having an Ownership Boundary. The System Operator and every User shall be responsible for the provision and erection of clear and unambiguous labelling showing the numbering and nomenclature of its Apparatus on sites having an Ownership Boundary.

DC 16.3.3 Changes to existing Apparatus

Where the System Operator or a User needs or wishes to change the existing numbering and/or nomenclature of any of its Apparatus on any site having an Ownership Boundary, the provisions of DC 16 shall apply with any amendments necessary to reflect that only a change is being made.

Where any Party changes the numbering and/or nomenclature of its Apparatus, which is the subject of DC 16, that party shall be responsible for the provision and erection of clear and unambiguous labelling.

DC 17 SPECIAL SYSTEM TESTS

DC 17.1 Introduction

DC 17.1.1 Distribution Code Section (DC 17) sets out the responsibilities and procedures for arranging and carrying out Special System Tests which have or may have an effect on the System Operators Distribution System or Users Systems. Special System Tests are those tests which involve either simulated or the controlled application of irregular, unusual or extreme conditions on the System or any part of the System, but which do not include commissioning or re-commissioning test or any other tests of a minor nature.

DC 17.2 Objective

DC 17.2.1 The objectives of DC 17 are to:

- a. ensure that the procedures for arranging and carrying out Special System Tests are such that, so far as practicable, Special System Tests do not threaten

the safety of personnel or the general public and cause minimum threat to the security of supplies, the integrity of Plant or Apparatus and are not detrimental to the System Operator and Users; and

- b. set out procedures to be followed for establishing and reporting Special System Tests.

DC 17.3 Procedure

DC 17.3.1 General

If the System Test proposed by the System Operator or the User connected to the Distribution System will or may have an effect on the Transmission System then the provisions of DC 17 and the Transmission Code shall apply.

Special System Tests which have a minimal effect on the Distribution System or Systems of other Users shall not be subject to this procedure; minimal effect will be taken to mean variations in voltage, frequency and waveform distortion of a value not greater than those figures which are defined in the Distribution Planning and Connection Section of the Codes.

DC 17.3.2 Proposal Notice

When the System Operator or a User intends to undertake a System Test which will have or may have an effect on the System or other User's Systems normally notice shall be provided twelve (12) months in advance of the proposed System Test, or as otherwise agreed by the System Operator, by the person proposing the System Test (the Test Proposer) to the System Operator and to those Users who may be affected by such a System Test.

The proposal shall be in writing and shall contain details of the nature and purpose of the proposed System Test and shall indicate the extent and situation of the Plant or Apparatus involved.

If the information set out in the proposal notice is considered insufficient by the recipient they shall contact the Test Proposer with a written request for further information which shall be supplied as soon as reasonably practicable. The System Operator shall not be required to do anything under DC 17 until it is satisfied with the details supplied in the proposal or pursuant to a request for further information.

If the System Operator wishes to undertake a System Test the System Operator shall be deemed to have received a proposal of that System Test.

DC 17.3.3 Preliminary notice and establishment of Test Panel

the System Operator shall have overall co-ordination of the System Test, using the information supplied to it under DOC11 and shall identify in its reasonable estimation,

which Users other than the Test Proposer, may be affected by the proposed System Test.

DC 17.3.4 Test Panel

A Test Co-ordinator, who shall be a suitably qualified person, shall be recommended by the Test Proposer and approved by the System Operator with the agreement of the Users which the System Operator has identified may be affected and shall act as Chairman of the Test Panel (the Test Panel).

All Users identified under DC 17 shall be given in writing, by the Test Coordinator, a preliminary notice of the proposed System Test. The preliminary notice shall contain:

- a. the Test Co-ordinator s name and nominating company;
- b. the details of the nature and purpose of the proposed System Test, the extent and situation of the Plant or Apparatus involved and the Users identified by the System Operator;
- c. an invitation to each identified User to nominate a suitably qualified person to be a member of the Test Panel for the proposed System Test.

The preliminary notices shall be sent within one month of the receipt of the proposal notice or the receipt of any further information requested.

As soon as possible after the expiry of this one month period all relevant Users and the Test Proposer shall be notified by the Test Co-ordinator of the composition of the Test Panel.

A meeting of the Test Panel shall take place as soon as possible after the relevant Users and the Test Proposer have been notified of the composition of the Test Panel.

The Test Panel shall consider:

- a. the details of the nature and purpose of the proposed System Test and other matters set out in the proposal notice;
- b. the economic, operational and risk implications of the proposed

System Test;

- a. the possibility of combining the proposed System Test with any other tests and with Plant and/or Apparatus outages which arise pursuant to the operational planning requirements of the System Operator and Users; and
- b. implications of the proposed System Test on the Scheduling and Dispatch of Generating Plant, insofar as it is able to do so.

Users identified under DC 17 and the System Operator, whether or not they are represented on the Test Panel, shall be obliged to supply that Test Panel upon written

request with such details as the Test Panel reasonably requires in order to consider the proposed System Test.

The Test Panel shall be convened by the Test Co-ordinator when it is necessary to conduct its business, subject to the oversight of the System Operator.

DC 17.3.5 Proposal report

Within two months of the first meeting the Test Panel shall submit a report, which in this DC 17 shall be called a proposal report, which shall contain:

- a. proposals for carrying out the System Test (including the manner in which the System Test is to be monitored);
- b. an allocation of costs (including un-anticipated costs) between the affected Parties, (the general principle being that the Test Proposer shall bear the costs); and
- c. such other matters as the Test Panel consider appropriate.

The proposals report may include requirements for indemnities to be given in respect of claims and losses arising from the System Test. All System Test procedures must comply with all applicable legislation.

If the Test Panel is unable to agree unanimously on any decision in preparing its proposal report the proposed System Test shall not take place and the Test Panel shall be dissolved.

The proposal report shall be submitted to all those who received a Preliminary notice.

Within fourteen days of receipt of the proposal report, each recipient shall respond to the Test Co-ordinator with its approval of the proposal report or its reason for non-approval.

In the event of non-approval by one or more recipients, the Test Panel shall as soon as practicable meet in order to determine whether the proposed System Test can be modified to meet the objection or objections.

If the proposed System Test cannot be so modified then the System Test shall not take place and the Test Panel shall be dissolved.

If the proposed System Test can be so modified the Test Panel shall as soon as practicable, and in any event within one month of meeting to discuss the responses to the proposal report, submit a revised proposal report.

In the event of non-approval of the revised proposal report by one or more recipients, the System Test shall not take place and the Test Panel shall be dissolved.

DC 17.3.6 Final test programme

If the proposal report (or, as the case may be, the revised proposal report) is approved by all recipients, the proposed System Test can proceed and at least one month prior to the date of the proposed System Test, the Test Panel shall submit to the System Operator and all recipients of the proposal notice a programme which in this DC 17 shall be called a final test programme stating any switching sequence and proposed timings, a list of those staff involved in the carrying out of the System Test (including those responsible for site safety) and such other matters as the Test Panel deem appropriate.

The final test programme shall bind all recipients to act in accordance with the provisions contained in the programme in relation to the proposed System Test.

Any problems with the proposed System Test which arise or are anticipated after the issue of the final test programme and prior to the day of the proposed System Test must be notified to the Test Co-ordinator as soon as possible in writing. If the Test Co-ordinator decides that these anticipated problems merit an amendment to or postponement of the System Test he shall notify any party involved in the System Test accordingly.

If on the day of the proposed System Test operating conditions on the System are such that any party involved in the proposed System Test wishes to delay or cancel the start or continuance of the System Test, they shall immediately inform the Test Co-ordinator of this decision and the reasons for it. The Test Co-ordinator shall then postpone or cancel, as the case may be, the System

Test and shall if possible, agree with all parties involved in the proposed System Test another suitable time and date or if he cannot reach such agreement, shall reconvene the Test Panel as soon as practicable which shall endeavour to arrange another suitable time and date and the relevant provisions of DC 17 shall apply.

DC 17.3.7 Final report

At the conclusion of the System Test, the Test Proposer shall be responsible for preparing a written report (the final report) of the System Test for submission to other members of the Test Panel.

The final report shall include a description of the Plant and/or Apparatus, tested and of the System Test carried out, together with the results, conclusions and recommendations.

The final report shall not be distributed to any party which is not represented on the Test Panel unless the Test Panel having considered the confidentiality issues, shall have unanimously approved such distribution.

When the final report has been submitted under the Test Panel shall be dissolved.

DC 18 DISTRIBUTION METERING

DC 18.1 Purpose

DC 18.1.1 To establish the requirements for metering the Active and Reactive Energy and Demand input to and/or output from the Distribution System.

DC 18.1.2 To ensure appropriate procedures for metering reading; and

DC 18.1.3 To ensure that procedures are in place to manage disputed readings.

DC 18.2 Scope

DC 18.2.1 This Chapter applies to:

- a. The System Operator
- b. Users
- c. Embedded Generators

DC 15. METERING REQUIREMENTS EMBEDDED GENERATORS

DC 19.1 Overall Accuracy

DC 19.1.1 The overall accuracy of Generator metering is to be designed to give a tolerance of +/- 0.5% on an ongoing basis.

DC 19.2 Relevant Metering Policies, Standards and Specifications

DC 19.2.1 Both Primary and Backup Metering systems shall be installed to accumulate the outputs and/or inputs at the High Voltage side bushing of the Generating Unit step up transformer.

DC 19.2.2 The System Operator shall own and maintain the Primary Metering System while the Generator shall own and maintain the Backup Metering System.

DC 19.2.3 Each meter shall have its own Current Transformer (CT) and Voltage Transformer (VT) and necessary independent Systems to function effectively.

DC 19.2.4 Instrument transformers shall conform to ANSI Standards C12.11 and C57.14 Class 03 and shall have sufficient capacity to handle the attached Equipment. The ANSI standards refer to the physical characteristics of meters and the procedures and practices related to type and pattern approval. The detailed use of these standards in the testing of meters are set out in the OUR document Meter Testing Administrative Protocol which is attached at Appendix B.

- DC 19.2.5 The Current Transformers secondary winding used for metering purposes shall supply only the metering Equipment and associated Systems.

Notwithstanding the foregoing each Current Transformer may have other secondary windings that may be used for purposes other than metering.

- DC 19.2.6 Voltage Transformers' secondary windings may be used for metering and other purposes provided that the total loading does not exceed one half burden of the rating of the transformer.

DC 19.3 Parameters for Meter Reading

- DC 19.3.1 The Generator shall provide and install appropriate Equipment and shall make a continuous recording on appropriate magnetic media or equivalent of the Net Energy Output of the Generating Unit(s).

- DC 19.3.2 The parameters to be metered shall be subject to the Interconnection Agreement between the Generator and the System Operator, and may consist of but are not limited to any or all of the following parameters:

- a. Active Energy (Wh) OUT;
- b. Active Energy (Wh) IN;
- c. Reactive Energy (VARh) First Quadrant;
- d. Reactive Energy (VARh) Fourth Quadrant;
- e. Active Power Demand (W) OUT;
- f. Active Power Demand (W) IN;
- g. Reactive Power Demand (VAR) First Quadrant; and
- h. Reactive Power Demand (VAR) Fourth Quadrant.

All units shall be expressed at appropriate multiples determined by the maximum expected Demand.

DC 19.4 Frequency of Meter Reading

- DC 19.4.1 The Demand Interval shall be fifteen (15) minutes and shall be set to start at the beginning of the hour. Demand shall be calculated by averaging the respective parameters over the stated Demand Interval.

DC 19.5 Generators <100kW

- DC 19.5.1 For small Generators with a rated capacity below 100kW the full generator metering requirements above may be reduced. These generators shall be permitted to be metered using separate import and export meters. DC 19.5.2 The metering requirements for such connection shall have the specification and accuracy as defined in Section DC 20.

DC 19.6 Metering Responsibility (Embedded Generators)

DC 19.6.1 It is the responsibility of Embedded Generators to cooperate with the System Operator in the execution of all its responsibilities under this code.

DC 19.6.2 The costs for installation and replacement of meters shall be outlined in the Generator's Power Purchase Agreement or Standard Offer Contract.

DC 20. METERING REQUIREMENTS - USERS

DC 20.1 Overall Accuracy

DC 20.1.1 The overall accuracy of the metering for revenue purposes is to be designed to give a tolerance of +/- 1% when tested in the laboratory and +/- 2 when tested in the field.

DC 20.2 Relevant Metering Policies, Standards and Specifications

DC 20.2.1 The meters, and associated installations, used on the System Operator's Distribution System shall comply with the following documents which are identified as Distribution Code Technical Specifications in DGC10.6 or issued by the OUR:

- a. JPS Engineering Instruction 4.7
- b. OUR Document ELE 2005/07 Electricity Meter Testing in Jamaica - Protocol on Administrative and Testing Procedures and
- c. Meter Facilities Policy as set out in JPS Engineering Bulletin TSD 007/3

DC 20.2.2 The meters shall be designed, constructed and operated to comply with the latest revision of the relevant ANSI standards or international equivalents in particular:

- a. ANSI C12.1 2008 The Electric Meters code for Electricity Metering;
- b. ANSI C12:10 2004 Physical aspects of watt-hour meters - safety standard; and
- c. ANSI C12:20 2002 Electricity meters 0.2 and 0.5 accuracy Classes.

DC 20.3 Requirement for Metering

DC 20.3.1 All Exit Points and Entry Points to the Distribution System shall have appropriate metering in accordance with this Distribution Metering Code.

DC 20.4 Metering Responsibility (Users)

DC 20.4.1 It is the responsibility of the System Operator to ensure that all Exit Points and Entry Points are metered in accordance with this code.

DC 20.4.2 It is the responsibility of Users to cooperate with the System Operator in the execution of all its responsibilities under this code.

DC 20.4.3 The costs for installation and replacement of meters shall be outlined in the User s Connection Agreement and/or the Standard Terms and Conditions of Service.

DC 21.0 METERING EQUIPMENT

DC 21.1.1 The metering Equipment shall consist of :
Revenue Meters;

- a. Current and Voltage Transformers where applicable;
- b. All interconnecting cables, wires and associated devices, seals and protection;
and
- c. All Equipment associated with Advanced Metering Infrastructure.

DC 21.2 Revenue Meters

DC 21.2.1 The revenue meter shall have the appropriate rating for the connection requirements to be supplied and shall conform to the terms of the Connection Agreement between the System Operator and User/Generator.

DC 21.2.2 Meters shall have an accuracy in accordance with ANSI class 0.5 or international equivalent.

DC 21.2.3 At the System Operator s discretion Advanced Metering Infrastructure may be installed at some customers sites. This metering infrastructure enables two way communication with the metering Systems. These devices shall comply with the specifications in DC 16.2.2. The accuracy shall be equivalent to ANSI Class 0.5.

DC 21.2.4 The relevant metered parameters, as required by the System Operator for billing purposes, shall be stored cumulatively on the meter and shall be able to be accessed by the UserGenerator.

DC 21.2.5 Where required these parameters may include any or all of the following depending on the connection and the tariff schedule:

- a. KW Hours (delivered and received);
- b. KVAh Hours (delivered and received);
- c. KVA Hours (delivered and received);
- d. Ampere Squared Hours
- e. Volt Squared Hours
- f. Maximum Demand (15 minute period)
- g. Power Factor

The above parameters shall be measurable over intervals from 1 minute to 60 minutes.

DC 21.3 Voltage Transformers

- DC 21.3.1 All Voltage Transformers shall comply with IEC Standards or their equivalents and shall have an accuracy class of 0.5.
- DC 21.3.2 The burden in each phase of the Voltage Transformer shall not exceed the specified burden of the said Voltage Transformer.

DC 21.4 Current Transformers

- DC 21.4.1 All Current Transformers shall comply with IEC Standards or their equivalents and shall have an accuracy class of 0.5.
- DC 21.4.2 The burden in each phase of the Current Transformer shall not exceed the specified burden specification of the said Current Transformer.

DC 22. METERING POINTS

DC 22.1 Whole Current Metering

- DC 22.1.1 The Metering Point should be as close as possible to the Connection Point.
- DC 22.2 CT Metering
- DC 22.2.1 The Metering Point shall be at the position of the Current Transformers used for the metering system. This should be designed to be as close as possible to the Connection Point.
- DC 22.2.2 Current Transformers should be installed in a separate chamber and must be before the main switch (on the line side). They shall be housed in suitable metal enclosures, and be able to be secured.
- DC 22.2.3 Where the Connection Point is declared on the outgoing side of a High voltage circuit breaker the metering Current Transformers may be accommodated in that circuit breaker unit.
- DC 22.2.4 Where appropriate the Metering Point should be at the same voltage as the Connection Point. Where the Metering Point is at a lower voltage than the Connection Point then appropriate loss factors should be calculated to ensure any additional loss is appropriately accounted for.

DC 23. METER READING AND COLLECTION SYSTEMS

DC 23.1 Meter Reading and Recording Responsibility

- DC 23.1.1 It is the responsibility of the System Operator to ensure that meters are read in accordance with the requirements of overall standard EOS7 in the System Operators Licence.
- DC 23.1.2 Meter reading and recording shall be undertaken by a suitable authorised representative of the System Operator.
- DC 23.1.3 It is the responsibility of Users and Embedded Generators to cooperate with the System Operator in the execution of its responsibilities under this code.
- DC 23.1.4 The User shall be provided with access to its billing and consumption records on request.

DC 24 APPROVAL OF METERS

- DC.24.1 Only meters that have received pattern approval from the Bureau of Standards, Jamaica (BSJ) in accordance with the OUR Document ELE 2005/07 Electricity Meter Testing in Jamaica - Protocol on Administrative and Testing Procedures, may be used on the System Operators Distribution System.

DC 25 CALIBRATION AND SEALING

DC 25.1 Calibration

- DC 25.1.1 All meters (new meters and repaired meters) rated above 12kVA shall be calibrated and the tolerance adjusted to ensure that it measures as close to zero tolerance as possible prior to field installation.
- DC 25.1.2 All meters rated above 12kVA shall be recalibrated every 10 years where unless they have a manufacturers guaranteed calibration period in which case this period shall be used.
- DC 25.1.3 All meters rated at 12kVA and below shall comply with the requirements of acceptance testing in OUR Document ELE 2005/07 Electricity Meter Testing in Jamaica - Protocol on Administrative and Testing Procedures, prior to field installation.
- DC 25.1.4 All laboratory calibration shall be undertaken in laboratories accredited by the Bureau of Standards, Jamaica (BSJ).

DC 25.2 Traceability

DC 25.2.1 The kilowatt hour standard used to calibrate electricity meters shall be traceable to the Systeme Internationale (SI) at the Bureau Internationale des Poids et Mesures. This extends to the calibration of Equipment used to calibrate meters.

DC 25.3 Sealing

DC 25.3.1 All meters shall be constructed to enable the meter unit to be sealed to prevent unauthorised access or interference with the Operation of the meter or the input terminals of the meter.

DC 25.3.2 All meters shall be sealed to prevent unauthorised access or interference with the Operation of the meter or the input terminals of the meter.

DC 25.3.3 Seals applied after calibration shall be marked with the date that recalibration is required.

DC 25.3.4 All seals shall include marks that identify the authorised person that sealed the meter.

DC 26 METERING DISPUTES

DC 26.1 Meter Accuracy Check

DC 26.1.1 A User/Embedded Generator has a right to request a meter accuracy check when they consider that the meter may be reading incorrectly in accordance with the meter testing protocol.

DC 26.1.2 Should a User/Embedded Generator request more than one accuracy check in a single calendar year then the System Operator may charge for these additional check should the accuracy be within +/-2%.

DC 26.2 Resolution of Disputes

If the metering system is found to be inaccurate by more than the allowable error and the System Operator and the Generator/User fail to agree upon an estimate for the correct reading within a reasonable time (as specified in the relevant Power Purchase Agreement or Connection Agreement or Standard Offer Contract) of the Dispute being raised, then the matter may be referred for arbitration by either party in accordance within the relevant specified agreements.

DC 23 INSPECTION AND TESTING

DC 27.1 Maintenance Policy

DC 27.1.1 The System Operator shall put in place and implement a policy for the inspection and testing and recalibration of all metering Equipment. This policy shall be in accordance with the procedures set out in DC 16.2 above.

DC 27.2 Maintenance Records

DC 27.2.1 The System Operator shall keep all test results, maintenance programme records and sealing records for a period of at least 5 years.

DC 27.3 Generator Metering

DC 27.3.1 The System Operator and Generator shall abide by the conditions of the Generation Code that details the maintenance procedures to be applied in the case of Generator meters. The Generation Code includes provisions on the use of back-up meters when metering inaccuracies are suspected and on the resolution of metering Disputes.

DC 28 DISTRIBUTION DATA REGISTRATION CODE

DC 28.1 General

DC 28.1.1 The Data Registration Code (DRC) sets out a unified listing of all data required by the System Operator from Users and by Users from the System Operator.

DC 28.1.2 Where there is any inconsistency in the data requirements under any particular section of the Distribution Code and the Data Registration Code the provisions of the particular Chapter of the Distribution Code shall prevail.

DC 28.1.3 The Code under which any item of data is required specifies the procedures and timing for the supply of data, for routine updating and for recording temporary or permanent changes to data.

DC 28.1.4 The DRC also lists data required to be provided by Generators under the Generation Code. This data is provided for

DC 28.2 Objective

DC 28.2.1 The objective of the DRC is to:

- a. List and collate all the data to be provided by each category of User to the System Operator under the Distribution Code;
- b. List all data to be provided by the System Operator to each category of User under the Distribution Code; and
- c. List all data to be provided by Generators to the System Operator and by the System Operator to Generators under the terms of the Generation Code.

DC 28.3 Scope

DC 28.3.1 The Users to which the DR Section of this Code applies are:

- a. Generators under the terms of the Generation Code;
- b. JPS in its role as System Operator; and
- c. Users connected directly to the Distribution System.

DC 29 DATA CATEGORIES AND STAGES IN REGISTRATION

DC 29.1 General

DC 29.1.1 Within the DRC each item of data is allocated to three categories.

- a. System Planning Data as required by the Planning and Connection Section of the Distribution Code;
- b. Generation Planning Data as required by the Generation Code;
- c. Operational Data as required by the Operations Code. This section also includes data required from Generators in accordance with the Scheduling and Dispatch provisions of the Generation Code.

DC 30. PROCEDURES AND RESPONSIBILITIES

DC 30.1 Responsibility for Submission and Updating of Data

DC 30.1.1 In accordance with the provisions of the various Chapters of the Distribution Code, each User must submit data as summarised, listed and collated in the attached Schedules.

DC 30.2 Methods of Submitting Data

DC 30.2.1 The data must be submitted to the System Operator. The name of the person at the User who is submitting each Schedule of data must be included.

DC 30.2.2 The data may be submitted via a computer link if such a data link exists between a User and the System Operator or utilising a data transfer media, such as floppy diskette, magnetic tape, CD ROM etc after obtaining the prior written consent from the System Operator.

DC 30.3 Changes to Users Data

DC 30.3.1 The User must notify the System Operator of any change to data which is already submitted and registered with the System Operator in accordance with each Chapter of the Distribution Code.

DC 30.4 Data not supplied

DC 30.4.1 If a User fails to supply data when required by any Chapter of the Distribution Code, the System Operator shall estimate such data if and when, in the view of the Grid Operator, it is necessary to do so.

DC 30.4.2 If the System Operator fails to supply data when required by any Chapter of the Distribution Code, the User to whom that data ought to have been supplied, shall estimate such data if and when, in the view of that User, it is necessary to do so.

DC 30.4.3 Such estimates shall, in each case be based upon data supplied previously for the same Plant or Apparatus or upon corresponding data for similar Plant and/or Apparatus or upon such other information as the System Operator or that User, as the case may be, deems appropriate.

DC 30.4.4 The System Operator shall advise a User in writing of any estimated data it intends to use relating directly to that User Plant and/or Apparatus in the event of data not being supplied.

DC 30.4.5 The User shall advise the System Operator in writing of any estimated data it intends to use in the event of data not being supplied.

Schedule	Data Type	Description	User	Code Section	JPS Procedure
I	User System Data	Electrical parameters relating to Plant and Apparatus connected to the Distribution System	JPS	DC 7.1 DC 7.2 DC 7.3	EI 3.1 SOPP 4 SOPP 7 SOPP 9
II	Load Characteristics	The estimated parameters of loads in respect of, for example, harmonic content, frequency response.	JPS	DPC 1.2 DPC 3	
III	Demand profiles and Active Energy	Total Demand and Active Energy taken from the Distribution System	JPS	DPC 1.2 DPC 3 DC 7.1 DOC 2.3 GSDC 3.5.1	

IV	Connection Point	Information related to Demand, and a summary of Embedded Generators and Customer generation connected to the Connection Point.	JPS User	DPC 1.2 DPC 3 DPC 4.1 DPC 4.2 DPC 4.3 DPC 5	
V	Demand Control	Information related to Demand Control	JPS User	DOC 5 GSDC 3.5.1	EI 1.6 SOPP 11
VI	Fault Infeed	Information on Short Circuit contribution to the Distribution System.	JPS User GEN	DPC 1.2 DPC 3.5	

Key to Users

GEN Generator

Abbreviations used in all Schedules:

DPC : Distribution Planning Code

DCC : Distribution Connections Code

DOC : Distribution Operations Code

TOC : Transmission Operations Code

GCC : Generation Connections Code

GSDC : Generation Scheduling and Dispatch Code

GMPC : Generation Maintenance Planning Code

GLSC : Generation Load Shedding Code

EI : JPS Engineering Instructions

SOPP : JPS System Operation Policies and Procedures

NOTE: In the Schedules Data Category refers to the Code Sections and/or JPS Instructions/Procedures.

Schedule I Users System Data

The data in this Schedule I is required from all Users with appropriate Demand at the discretion of the System Operator.

a Description	ts	Code Section	ruction/ cedure
Operation Line Diagram Single Line Diagram showing all existing and proposed Equipment and Apparatus and Connections together with Equipment rating	Drawing	DC 7.3	SOPP 9
Site Responsibility Schedules	Schedule	DCC 5.3	
Safety Coordinators	Text	DOC 7.3	
Reactive Compensation Equipment For all reactive compensation Equipment connected to the User System at [12kV] and above, other than Power Factor correction Equipment associated directly with a Customer Plant, the following details Type of Equipment (e.g. fixed or variable) Capacitive rating Inductive rating Operating range Details of any automatic control logic to enable operating characteristics to be determined Point of Connection to the User System in terms of electrical location and System voltage	Text MVar MVar MVar Text and/or Diagrams Text	DC 7.3	SOPP 4 SOPP 7
Switchgear For all switchgear (i.e. circuit breakers, switch disconnectors and isolators) on all circuits Directly Connected to the Connection Point including those at Production Facilities Rated voltage Operating voltage Rated short-circuit breaking current Single phase Three phase	kV kV kA kA	DC 7.3	SOPP 7
Rated load breaking current Single phase Three phase	kA kA		

Rated peak short-circuit making current Single phase Three phase	kA kA		
User Connecting System data: Circuit Parameters for all circuits		DC 7.3	SOPP 7
Data Description	Units	Code Section	JPS Instruction/ Procedure
For all Systems at [12] kV and above Connecting User System to the Distribution System, the following details are required relating to that Connection Point Rated voltage Operating voltage Positive phase sequence Resistance Reactance Susceptance	kV kV % on 100 % on 100 % on 100		
Zero phase sequence Resistance Reactance Susceptance	% on 100 % on 100 % on 100		
Interconnecting transformers For transformers between the Distribution System and the User System, the following data is required: Rated Power Rated Voltage Ratio (i.e. primary/secondary/tertiary) Winding arrangement Vector group	MVA	DC 7.3	SOPP 7 EI 3.1
Positive sequence resistance @ maximum tap @ minimum tap @ nominal tap	% on MVA % on MVA % on MVA		
Positive sequence reactance @ maximum tap @ minimum tap @ nominal tap	% on MVA % on MVA % on MVA		
Zero phase sequence reactance Tap changer type Tap changer range Tap changer step size Impedance value (if not directly earthed)	% on MVA On/Off		
MV Motor Drives		DC 7.3	SOPP 7

Following details are required for each MV motor drive connected to the User System Rated VA			
Rated Active Power	MVA		
Full Load Current	MW		
Means of starting	kA		
Starting Current	Text		
	kA		

Data Description	Units	Code Section	JPS Instruction/ Procedure
Motor torque/speed characteristics Drive torque/speed characteristics Motor plus drive inertia constant			
<p>User Protection Data</p> <p>Following details relates only to protection Equipment which can trip, inter-trip or close any Connection Point circuit breaker or any System Operator circuit breaker A full description including estimated settings, for all relays and Protection Systems installed or to be installed on the User System</p> <p>A full description of any auto-reclose facilities installed on the User System, including type and time delays</p> <p>The most probable fault clearance time for electrical faults on any part of the User System Directly Connected to the Distribution System</p>	<p>Text</p> <p>Text</p> <p>ms</p>	DC 7.3	SOPP 7
<p>Transient Over-Voltage Assessment Data</p> <p>When requested by JPS, each User is required to submit data with respect to the Connection Site as follows (undertaking insulation co-ordination studies) Busbar layout, including dimensions and geometry together with electrical parameters of any associated Current Transformers, Voltage Transformers, wall bushings, and support insulators</p> <p>Physical and electrical parameters of lines, cables, transformers, reactors and shunt compensator Equipment Connected at that busbar or by lines or cables to the busbar (for the purpose of calculating surge impedances)</p> <p>Specification details of connected directly or by lines and cables to the busbar including basic insulation levels</p> <p>Characteristics of over-voltage protection at the busbar and at the termination of lines and cables connected at the busbar</p>	<p>Diagram</p> <p>Text</p> <p>Text</p> <p>Text</p>	DC 7.3	SOPP 7

Schedule II Load Characteristics

The following information is required from each User with appropriate Demand ,at the discretion of the System Operator, regarding existing and future connections for each Connection Point.

Description	Units	Years for Future Years				Data category
		Year 1	Year 2	Year 3	Year 4	
1. Details of individual loads which have fluctuating, pulsing or other characteristics significantly different from the typical range of Domestic, Commercial or Industrial loads supplied 2. Sensitivity of Demand to variations in voltage and frequency on the Distribution System at the peak Connection Point Demand (Active Power) o Voltage sensitivity o Frequency sensitivity 3. Phase unbalance imposed on the Distribution System o Maximum o Average 4. Maximum harmonic content imposed on the Distribution System 5. Details of loads which may cause Demand fluctuations greater than [1 MW] at a Connection Point	W/kV VAr/kV MW/Hz MVar/Hz					DPC 4.3

III. Demand Profiles and Active Energy Data

The following information is required from each Users with appropriate Demand, at the discretion of the System Operator.

Data Description	FY0	FY1	FY2		Update Time	Data Category
ecast daily Demand profiles in respect of each User System (summated over all hnection Points)	1. Day of User maximum Demand (MW) at Annual MD Conditions 2. Day of peak Distribution System Demand (MW) at Annual MD Conditions 3. Day of minimum Distribution System Demand (MW) at Average Conditions (Delete as appropriate)				[End uary]	C 4.1 7.3 C 2.3 DC .1

0 : 0100						
0 : 0200						
0 : 0300						
0 : 0400						
0 : 0500						
0 : 0600						
0 : 0700						
0 : 0800						
0 : 0900						
0 : 1100						
0 : 1200						
0 : 1300						
0 : 1400						
0 : 1500						
0 : 1600						
0 : 1700						
0 : 1800						
0 : 1900						
0 : 2000						
0 : 2100						
0 : 2200						
0 : 2300 2300 : 2400						
Data Description	FY0	FY1	FY2		Update Time	Data Category
Data Description	YR 0	YR 1	YR 2		Update Time	Data Category
The annual MWh requirements for each User System (summated over all Connection Points for the Distribution System) at Average Conditions:					[End Sept]	DPC 4.1 DC 7.3

1. Domestic 2. Agricultural 3. Commercial 4. Industrial 5. Parish 6. Public Lighting 7. [Any other identifiable categories of Generator] 8. User System losses						
Applicable only Users with Embedded Generator s					[End Sept]	DPC 4.1.3 DPC 5 DC 7.4
1. Total Demand (MW) on its System 2. Active Energy (MWh) requirement on its System 3. Active Energy from Embedded Generation						

IV. Connection Point Data

The following information is required from each User with appropriate Demand, at the discretion of the System Operator.

Data Description	Units	0	1	2	Update Time	Data Category
------------------	-------	---	---	---	-------------	---------------

Forecast Demand and Power Factor related to each Connection Point							
1. Annual peak hour User MW Demand at Annual MD pf Conditions						[End Sept]	C 4.1 C 4.3
2. User Demand at Distribution System peak hour Demand pf at Annual MD Conditions	MW					[End Sept]	C 4.1 C 4.3
3. User Demand at minimum MW Distribution System pf Demand at Average Conditions	hour					[End Sept]	C 4.1 C 4.3
Demand Transfer Capability						[End Sept]	
Where a User Demand or group of Demands may be fed by alternative Connection Point(s) , the following details should be provided:							C 4.1 C 4.3
1. Name of the alternative Connection Point(s)							
2. Demand transferred	MW MVA						
3. Transfer arrangement (manual or automatic)							
4. Time to effect transfer	hrs						

V. Demand Control

Data

The following information is required from the System Operator or Embedded Customer

Data Description	Units	Time Covered	Update Time	Data Category
Programming Phase: applicable to the System Operator and Embedded Generator				
Demand Control which may result in a Demand change of [1] MW or more on an hourly and Connection Point basis 1. Demand profile	MW	Weeks 1 to 8	10:00 Friday	DOC 5.3 EI 1.6 SOPP 11 GSDC 3.5.1
2. Duration of proposed Demand Control	hrs	Weeks 1 to 8	10:00 Friday	
Control Phase: applicable to Distribution System Operator and Non-Embedded Generator				
1. Demand Control which may result in a Demand change of 1 MW or more averaged over any hour on any Connection Supply Point which is planned after 10:00 hours	Mw	Now to 7 Days	mediate	DOC 5
2. Any changes to planned Demand Control notified to the System Operator prior to 10:00 hours	hrs	Now to 7 Days		
Post Control Phase				
Demand reduction achieved on previous calendar day of 1 MW or more averaged over any Connection Point, on an hourly and Connection Point basis 1. Active Power profiles 2. Duration	MW hrs	Previous Day Previous Day	10:00 Daily 10:00 Daily	DOC 5

VI. Fault Infeed Data

The following information is required from each User who is connected to the Distribution

System via a Connection Point where the User System contains Embedded Generating Unit(s) and/or motor loads. The data is required for the three following years

Data Description	Units	Update Time	Data Category
Short Circuit Infeed to Distribution System from User System at a Connection Point			
Name of Connection Point: _____			
1. Symmetrical three-phase short circuit current infeed: <ul style="list-style-type: none"> o At instant of fault o After sub-transient fault current contribution has substantially decayed 	kA kA	[end Sept]	DPC 3.5
2. Zero sequence source impedance values as seen from the Connection Point consistent with the maximum infeed above: <ul style="list-style-type: none"> o Resistance (R) o Reactance (X) 	% on 100 % on 100		
3. Positive sequence X/R ratio at instant of fault			

VII. User Outages Data

Data Description	Timescale Required	Update Time	Data Category
Generators and Non-Embedded Generator provide details of Apparatus owned by them other than generating Units at each Connection Point	Year 1	[end Sept]	
System Operator informs Users of aspects that may affect their Systems	Year 1		
Users inform System Operator if not in agreement with aspects as notified	Year 1		

Data Description	Units	Rate	Data Category
Individual Generating Unit Demand Demand supplied through unit transformer when Generating Unit is at Rated MW output	MW MVar		
Generating Unit Performance and Parameters General 1. Details of point of connection to the Distribution System of the Generating Unit in terms of geographical and electrical location and System voltage, including a Single Line Diagram 2. Type of Generating Unit (e.g. Steam Turbine Unit, Gas Turbine Unit, Cogeneration Unit, wind, etc) Registered Capacity 4. Distribution System Constrained Capacity (for Embedded Generating Units only) Rated Active Power Minimum Generation Rated Apparent Power	Text Text MW MW MW MW MVA	Required	C 1.2.4 C 1.2.4
System Operator issues final Transmission System outage plan with advice on Operational Effects on User Systems	Year 1	[end Oct]	DOC 3.3
Embedded Generator and Users to inform Grid Operator of changes to outages previously requested	Week 8 ahead to year end	As occurring	DOC 3.3

Transmission Code is referenced as the final outage plan rests with Transmission.

VIII. Generator Planning Parameters Data

Generating Facility Name: _____

The following details are required from each Generating Facility with a rated capacity greater than [100kW] directly connected, or to be directly connected, to the Distribution System The data shall be supplied for the following 3 years.

Description	Units	Report Date Time	Data Category
Generating Facility Demand			
Demand associated with the Generating Facility supplied through the Distribution System or via a Generator's own System in addition to Demand supplied through unit transformer		1st Sept]	
Maximum Demand that could occur	MW MVA		
2. Demand at the time of peak Distribution System Demand	MW MVA		
3. Demand at the time of minimum Distribution System Demand	MW MVA		

The data in the following table shall be supplied for each Generating Unit

Data Description	Units	Rate	Data Category
Rated terminal voltage	kV		
Generator Performance Chart at stator terminals	Chart		
Net Dependable Power Capacity (on a monthly basis)	MW		
11. Short circuit ratio			
12. Turbo-Generator inertia constant (alternator plus prime mover)	MW/MVA		
13. Rated field current at Rated MW and MVA output and at rated terminal voltage	A		
14. Field current open circuit saturation curve as derived from appropriate manufacturer's test certificate at 120% rated terminal voltage	A		
o 110% rated terminal voltage	A		
o 100% rated terminal voltage	A		

o 90% rated terminal voltage	A		
o 80% rated terminal voltage	A		
o 70% rated terminal voltage	A		
o 60% rated terminal voltage	A		
o 50% rated terminal voltage	A		
Impedances			C 1.2.4
Direct axis synchronous reactance	% on MVA		
Direct axis transient reactance	% on MVA		
Direct axis sub-transient reactance	% on MVA		
Quadrature axis synchronous reactance	% on MVA		
Quadrature axis sub-transient reactance	% on MVA		
Stator leakage reactance	% on MVA		
Armature winding direct-current resistance	% on MVA		
Time Constants			C 1.2.4
Direct axis short-circuit transient time constant	secs		
Direct axis short-circuit sub-transient time constant	s		
Quadrature axis short-circuit sub-transient time constant	s		
Stator time constant	s		

Data Description	Units	Rate	Data Category
Generator Transformer			C 1.2.4
Rated Apparent Power	MVA		

2. Rated voltage ratio			
3. Winding arrangement			
4. Vector group			
5. Positive sequence resistance			
o @ maximum tap	% on MVA		
o @ minimum tap	% on MVA		
o @ nominal tap	% on MVA		
6. Positive sequence reactance o @ maximum tap	% on MVA		
o @ minimum tap	% on MVA		
o @ nominal tap	% on MVA		
Zero phase sequence reactance	% on MVA		
Tap changer range	±%		
Tap changer step size	%		
Tap changer type (i.e. on-load or off-load)	On/Off		
Excitation Control System Parameters			C 1.2.4
Exciter category (e.g. rotating or static)	Text		
2. Details of Excitation System described in block diagram showing transfer functions of individual elements (including Power System Stabiliser if fitted)	Diagram		
Rated field voltage	V		
Generator no-load field voltage	V		
Excitation System on-load positive ceiling voltage	V		
Excitation System no-load negative ceiling voltage	V		
Power System Stabiliser fitted?	Yes/No		
8. Details of over excitation limiter described in block diagram showing transfer functions of individual elements	Diagram		
9. Details of under excitation limiter described in block diagram showing transfer functions of individual elements	Diagram		

Description	Units	Update Frequency	Data Category
Governor Parameters (All Generating Units) Governor System block diagram showing transfer function of individual elements	Diagram		C 1.2.4
Prime Mover Parameters Prime mover System block diagram showing transfer function of individual elements and controllers	Diagram		C 1.2.4
Generator Flexibility Performance Details required with respect to Generators <ol style="list-style-type: none"> 1. Rate of loading following a weekend shut-down (Generator and Generating Facility) 2. Rate of loading following an overnight shut-down (Generator and Generating Facility) 3. Block load following Synchronising 4. Rate of De-loading from Rated MW 5. Regulating range 6. Load rejection capability while still Synchronised and able to supply Load 	MW/Min MW/Min MW MW/Min MW MW		C 1.2.4

IX. Generator Operational Planning Data

Generator Facility Name: _____

The following details are required from each Generator in respect of each Generating Unit with a rated capacity greater than [100kW].

Description	Units	Category	Generating Unit and Generating Unit Data
-------------	-------	----------	--

									GF
<p>am Turbine Generating Units</p> <p>1. Minimum notice required to synchronise under following conditions:</p> <p>o Hot start</p> <p>o Warm start</p> <p>o Cold start</p> <p>2. Minimum time between synchronising different Generating Units at a Generating Facility</p> <p>3. Minimum block Load requirement on synchronising</p> <p>4. Maximum Generating Unit loading rates from synchronising under following conditions:</p> <p>o Hot start</p> <p>o Warm start</p> <p>o Cold start</p> <p>Maximum Generating Unit de-loading rate</p> <p>6. Minimum interval between desynchronising and synchronising a Generating Unit (off-load time)</p>	<p>Min</p> <p>Min</p> <p>Min</p> <p>Min</p> <p>MW</p> <p>Min</p> <p>Min</p> <p>Min</p> <p>MW/Min</p> <p>Min</p>	<p>OC 3.2</p>							
<p>s Turbine Generating Units</p> <p>Minimum notice required to synchronise</p> <p>2. Minimum time between synchronising different Generating Units at a Generating Facility</p> <p>3. Minimum block Load requirement on synchronising</p>	<p>Min</p> <p>Min</p> <p>MW</p>	<p>OC 3.2</p> <p>PP 7</p>							

Description		Category	Generating Unit and Generating Unit Data						
									GF

4. Maximum Generating Unit loading rates from synchronising for									
o Fast start	Min								
o Slow start	Min								
Maximum Generating Unit de-loading rate	MW/Min								
6. Minimum interval between desynchronising and synchronising a Generating Unit	Min								

X. Scheduling and Dispatch Data

Generating Facility Name: _____

The following details are required from each Generator in respect of each Generating Unit with a rated capacity greater than [100kW].

Data Description	Units	Data Category	Generating Unit, and Generating Facility Data						
					U3				GF
Generating Unit Availability Notice		PC 3.2 PC 3.5.1 PC 5.1 P 7							
1. Generating Unit Availability o Power Capacity	MW								
o Start time	te/time								
Generating Unit unavailability									
o Start time	te/time								
o End time	te/time								
Generating Unit initial conditions									
o Time required for Notice to Synchronise	hrs								
o Time required for start-up	hrs								

4. Maximum Generation increase in output above declared Availability	MW								
5. Any changes to Primary Response and Secondary Response characteristics									
Scheduling and Dispatch Parameters		PC 3.2 PC 3.5.1 PC 5.1							
Generating Unit inflexibility o Description	Text								
o Start date	te/time								
o End date	te/time								
o Active Power	MW								
Data Description	Units	Data Category	Generating Unit, and Generating Facility Data						
					U3				GF
2. Generating Unit synchronising intervals									
Hot time interval	hrs								
Off-load time interval	hrs								
3. Station Generating Unit desynchronising intervals	hrs								
Generating Unit basic data									
Minimum Generation	MW								
Minimum shutdown time	hrs								
5. Generating Unit two shifting limitation									
6. Generating Unit minimum on time	hrs								
7. Generating Unit Synchronising Generation	MW								
8. Generating Unit Synchronising groups									
9. Generating Unit run-up rates with breakpoints	MW/min								
10. Generating Unit run-down rates with breakpoints	MW/min								

11. Generating Unit loading rates covering the range from Minimum Generation to Maximum Output	MW/min								
12. Generating Unit de-loading rates covering the range from Maximum Output to Minimum Generation	MW/min								
Generating Unit Merit Order Data(*) o Fuel data o Heat Rate data		OC 3.2.2							

(*)NOTE: Fuel data to be updated at the beginning of each month Heat Rate data to be updated following twice yearly tests

XI. Generator Outages Data

Generating Facility Name: _____

The following details are required from each Generator in respect of each Generating Unit with a rated capacity greater than 1MW.

Data Description	Units	Time Covered	date Time	a Category
Provisional Outage Programme				DOC 3.3 TOC3.3
1. Generating Units concerned	ID	Year 2 to 3	[End Oct]	GSDC 3.5.1 GMPC 5.1
2. Active Power not available as a result of Outage	MW	Year 2 to 3	[End Oct]	EI 1.11 SOPP 19
3. Remaining Active Power of the Facility	MW	Year 2 to 3	[End Oct]	
4. Duration of Outage	Weeks	Year 2 to 3	[End Oct]	

5. Start date and time or a range of start dates and times	date hrs	Year 2 to 3	[End Oct]	
System Operator issues Provisional Outage Programme to Users		Year 2 to 3	[End Sept]	
Agreement on Provisional Outage Programme	Text	Year 2 to 3	[End Oct]	
Final Outage Programme				TOC 3.3 DOC 3.3
1. Generating Units concerned	ID	Year 1	[End Oct]	GSDC 3.5.1 GMPC 5.1 SOPP 19
2. Active Power not available as a result of Outage	MW	Year 1	[End Oct]	
3. Remaining Active Power of the Plant	MW	Year 1	[End Oct]	
4. Duration of Outage	Weeks	Year 1	[End Oct]	

Description	Units	Time Covered	End Date	Category
5. Start date and time or a range of start dates and times	date hrs	Year 1	[End Oct]	
System Operator issues draft Final Outage Programme to Users		Year 1	[End Oct]	
System Operator issues Final Outage Programme to Users	Text	Year 1	[End Oct]	

Short Term Planned Maintenance Outage					GSDC 3.5.1 GMPC 5.1.3 SOPP 19
1. Generating Units concerned		Year 0	5	Days before	
2. Active Power not available as a result of Outage	MW	Year 0	5	Days before	
3. Remaining Active Power of the Facility	MW	Year 0	5	Days before	
4. Duration of Outage	Weeks	Year 0	5	Days before	
5. Start date and time or a range of start dates and times	Start date hrs	Year 0	5	Days before	

XII. System Operator Information to Users

The System Operator shall provide, where appropriate for the Demand, Users and prospective Users, with appropriate connection capacities, the following data related to the Distribution System.

Code	Description
DCC 5.4	Operation Diagram
DCC 5.3	Site Responsibility Schedules
DOC 2.3	<p>Demand</p> <p>The System Operator shall notify each User no later than the [end of October] of each calendar year, for the current calendar year and for each of the following 3 calendar years</p> <ol style="list-style-type: none"> 1. The date and time of annual peak of Distribution System Demand at Annual Maximum Demand Conditions 2. The date and time of annual minimum Distribution System Demand at Average Conditions
DPC 4.2	<p>Distribution System Data including</p> <p>Network Topology and ratings of principal items of Equipment</p> <p>Positive, negative and zero sequence data of lines, cables, transformers etc</p> <p>Generating Unit electrical and mechanical parameters</p> <p>Relay d protection data</p>

DPC 4.2	<p>The following Network Data as an equivalent voltage source at the voltage of the Connection Point to the User System</p> <p>Symmetrical three-phase short circuit current infeed at the instant of fault from the Distribution System</p> <p>Symmetrical three-phase short circuit current from the Distribution System after the sub-transient fault current contribution has substantially decayed</p> <p>Zero sequence source resistance and reactance values at the Connection Point, consistent with the maximum infeed below</p> <p>Pre-fault voltage magnitude at which the maximum fault currents were calculated</p> <p>Positive sequence X/R ratio at the instant of fault Appropriate</p> <p>interconnection transformer data</p>
DOC 7.3	Names of Safety Co-ordinators

	Description
	Outage Programmes
DOC 3.4	Provisional Outage programme showing the Generating Units expected to be withdrawn from service during each week of Years 2 and 3 for Planned Outages
DOC 3.5	Draft Final Outage programme showing the Generating Units expected to be withdrawn from service during each week of Year 1 for Planned Outages
	Demand Estimates and Operating Margin
	Synchronising and Desynchronising times of Embedded Generating Units to the Distribution System Operator
	Special Actions that may be required of Users

GSDC 3.2.3	Merit Order to be notified to Generators at the start of each month
GSDC 3.5.1	System Operator to provide daily schedule of expected availability and generation dispatch at 15:00hours each day for the following day and at 15:00hours on Friday for the following three (3) days

XIII. Metering Data

Data Description	Responsible Party	Data Category
<p>Connection and Metering Point reference details for both Delivery Point and Actual Metering Point</p> <p>Data communication details when communication Systems are used</p> <p>Data validation and substitution processes agreed between affected parties</p>		El 4.7

